

# Aspire Span


## RESIDENTIAL ROOFING

### DETAIL LIST

		<u>Revision</u>	<u>Date</u>
00 / 32	COVER SHEET		
01 / 32	ROOF RIDGE 01	1.1	19.12.2024
02 / 32	ROOF RIDGE 02	1.1	19.12.2024
03 / 32	SAWTOOTH RIDGE 01	1.1	19.12.2024
04 / 32	SAWTOOTH RIDGE 02	1.1	19.12.2024
05 / 32	SAW TOOTH SOFFIT DETAIL 01	1.2	19.12.2024
06 / 32	SAW TOOTH SOFFIT DETAIL 02	1.1	19.12.2024
07 / 32	ROOF VALLEY 01	1.1	19.12.2024
08 / 32	ROOF VALLEY 02	1.1	19.12.2024
09 / 32	BARGE 01	1.2	19.12.2024
10 / 32	BARGE 02	1.2	19.12.2024
11 / 32	GUTTER DETAIL 01	1.1	19.12.2024
12 / 32	GUTTER DETAIL 02	1.1	19.12.2024
13 / 32	CANTILEVER BARGE CAPPING DETAIL 01	1.2	19.12.2024
14 / 32	CANTILEVER BARGE CAPPING DETAIL 02	1.2	19.12.2024
15 / 32	PARAPET WITH TRANSVERSE APRON	1.1	19.12.2024
16 / 32	TRANSVERSE APRON	1.1	19.12.2024

### DETAIL LIST

		<u>Revision</u>	<u>Date</u>
17 / 32	PARALLEL APRON	1.2	19.12.2024
18 / 32	PIPE PENETRATION DIRECT FIXED BOOT FLASHING	1.1	19.12.2024
19 / 32	PIPE PENETRATION BACK TRAY BOOT FLASHING	1.2	19.12.2024
20 / 32	EXPANSION STEP DETAIL	1.1	19.12.2024
21 / 32	CHIMNEY PENETRATION DETAIL	1.1	19.12.2024
22 / 32	SIDE LAP DETAIL	1.1	19.12.2024
23 / 32	FASCIA AND BARGE FLASHING DIMENSIONS	1.1	19.12.2024
24 / 32	3D RIDGE TO BARGE JUCTION	1.2	19.12.2024
25 / 32	3D DUTCH GABLE	1.2	19.12.2024
26 / 32	3D APRON	1.2	19.12.2024
27 / 32	3D OVER 85mm DIAMETER PIPE PENETRATION	1.2	19.12.2024
28 / 32	3D CHIMNEY PENETRATION	1.2	19.12.2024
29 / 32	3D RIDGE/BARGE FLASHINGS	1.1	19.12.2024
30 / 32	3D DUTCH GABLE FLASHINGS	1.1	19.12.2024
31 / 32	CANTILEVER DRAWING	1.1	19.12.2024
32 / 32	PANEL PROFILE AND SIZE	1.2	19.12.2024

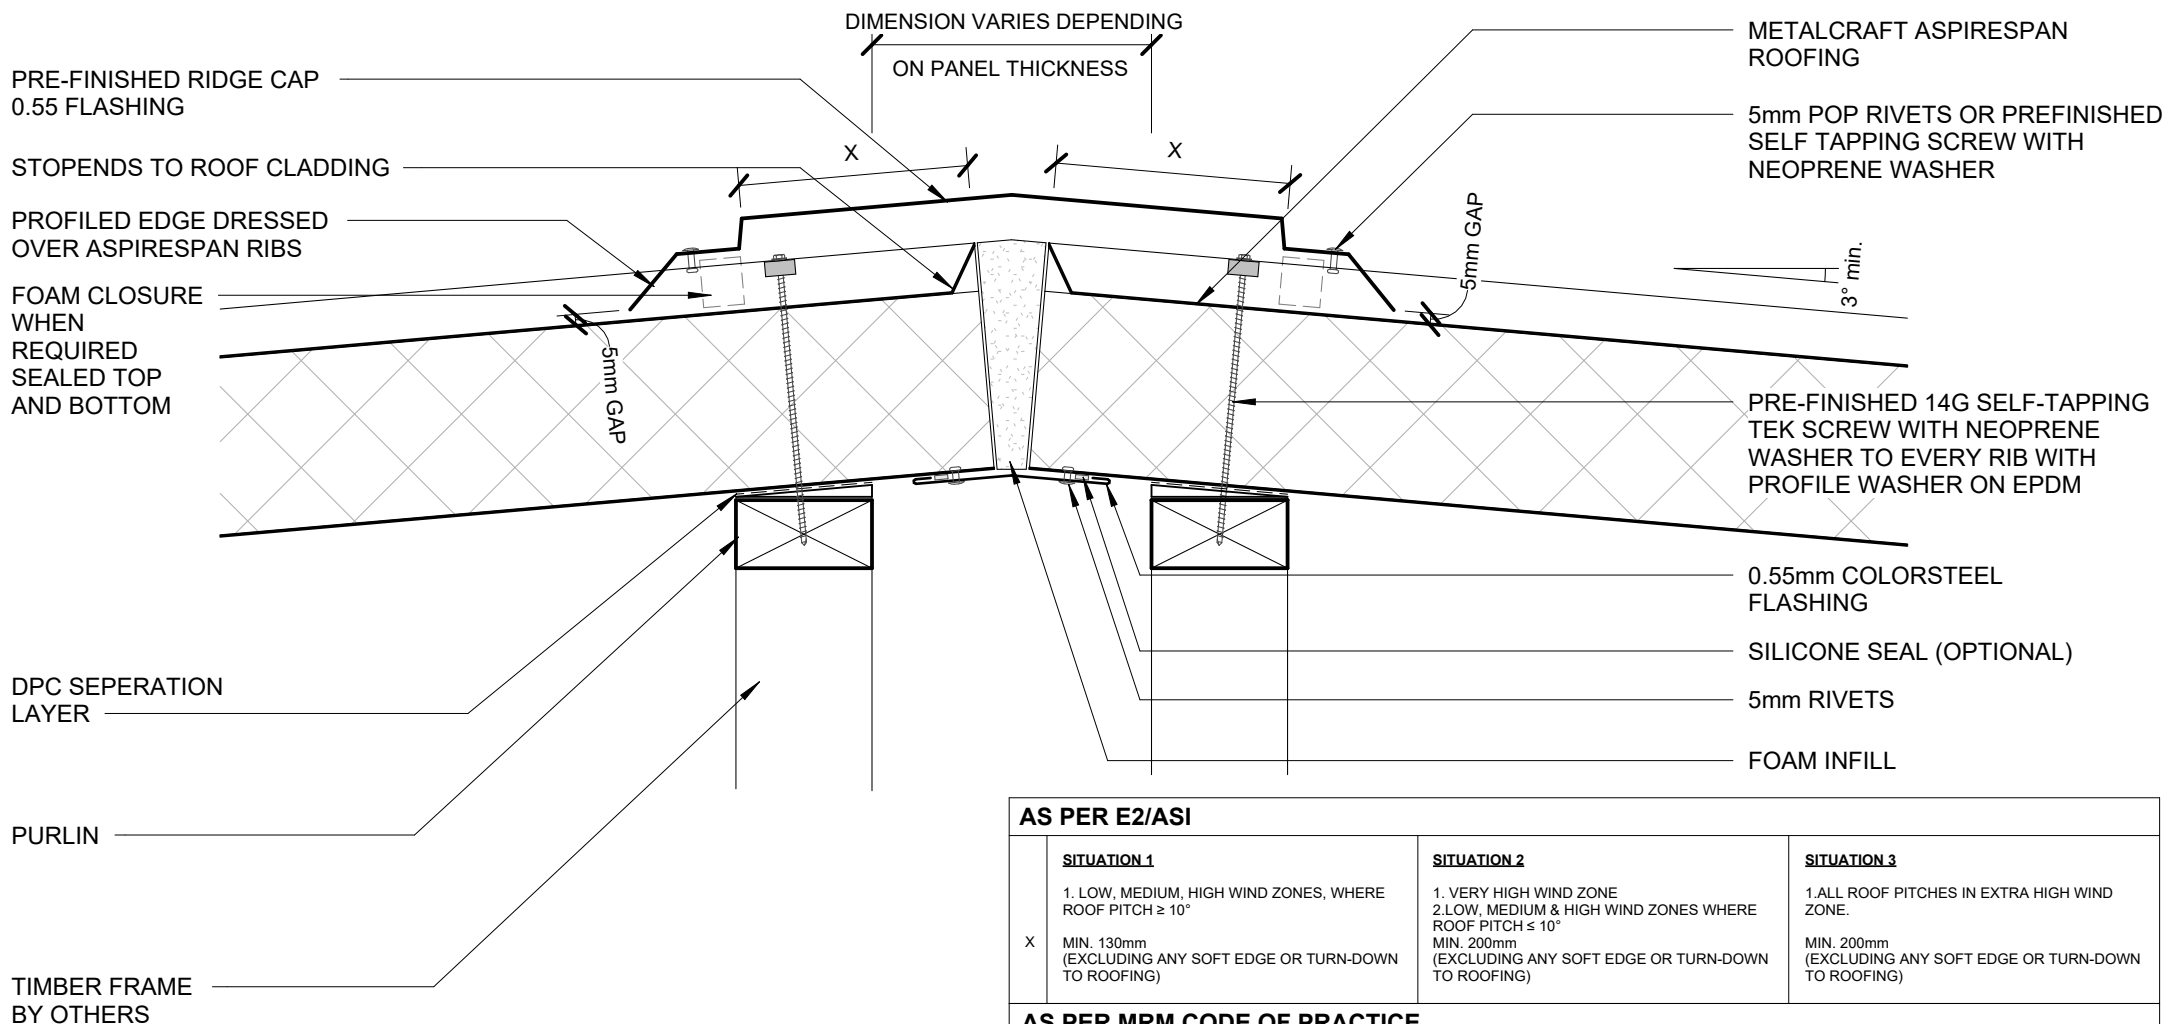

AS PER E2/ASI			
	SITUATION 1	SITUATION 2	SITUATION 3
	1. LOW, MEDIUM, HIGH WIND ZONES, WHERE ROOF PITCH $\geq 10^\circ$	1. VERY HIGH WIND ZONE 2. LOW, MEDIUM & HIGH WIND ZONES WHERE ROOF PITCH $\leq 10^\circ$	1. ALL ROOF PITCHES IN EXTRA HIGH WIND ZONE.
X	MIN. 130mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)	MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)	MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)
AS PER MRM CODE OF PRACTICE			
	CATEGORY A	CATEGORY B	CATEGORY C
	LOW, MEDIUM OR HIGH WIND ZONES - ALL ROOF PITCHES	VERY HIGH WIND ZONES ROOF PITCH $< 8^\circ$	SED WIND ZONES UP TO 60 m/s
	VERY HIGH AND EXTRA HIGH WIND ZONES WHERE THE PITCH IS EQUAL TO OR GREATER THAN $10^\circ$	EXTRA HIGH WIND ZONES - ALL ROOF PITCHES	ALL ROOF PITCH
X	MIN. 130mm	MIN. 200mm	MIN. 200mm
	CATEGORY D		
	SED WIND ZONES UP TO 68 m/s		
	ALL ROOF PITCH		
	MIN. 200mm + BAFFLE (REFER NZ MRM COP)		

PRE-FINISHED RIDGE CAP  
0.55 FLASHING

STOPENDS TO ROOF CLADDING

PROFIED EDGE OVER  
ASPIRESPAN RIBS

FOAM CLOSURE WHEN REQUIRED  
SEALED TOP AND BOTTOM SEALED  
TOP AND BOTTOM

DPC SEPERATION LAYER

PRE-FINISHED 14G SELF-TAPPING  
TEK SCREW WITH NEOPRENE  
WASHER TO EVERY RIB WITH  
PROFILE WASHER ON EPDM

0.55 COLOURSTEEL FLASHING

SILICONE SEAL (OPTIONAL)

TIMBER FRAME BY OTHERS

DIMENSION VARIES DEPENDING  
ON PANEL THICKNESS

FOAM INFILL

5mm POP RIVET OR PRE-FINISHED  
SELF-TAPPING TEK SCREW WITH  
NEOPRENE WASHER

METALCRAFT ASPIRESPAN  
ROOFING

3° min.

5mm GAP


5mm GAP

#### AS PER E2/ASI

SITUATION 1	SITUATION 2	SITUATION 3
1. LOW, MEDIUM, HIGH WIND ZONES, WHERE ROOF PITCH $\geq 10^\circ$  X MIN. 130mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)	1. VERY HIGH WIND ZONE 2. LOW, MEDIUM & HIGH WIND ZONES WHERE ROOF PITCH $\leq 10^\circ$ MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)	1. ALL ROOF PITCHES IN EXTRA HIGH WIND ZONE. MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)

#### AS PER MRM CODE OF PRACTICE

CATEGORY A	CATEGORY B	CATEGORY C	CATEGORY D
LOW, MEDIUM OR HIGH WIND ZONES - ALL ROOF PITCHES  VERY HIGH AND EXTRA HIGH WIND ZONES WHERE THE PITCH IS EQUAL TO OR GREATER THAN $10^\circ$  X MIN. 130mm	VERY HIGH WIND ZONES ROOF PITCH $< 8^\circ$  EXTRA HIGH WIND ZONES -ALL ROOF PITCHES  MIN. 200mm	SED WIND ZONES UP TO 60 m/s  ALL ROOF PITCH  MIN. 200mm	SED WIND ZONES UP TO 68 m/s  ALL ROOF PITCH  MIN. 200mm + BAFFLE (REFER NZ MRM COP)

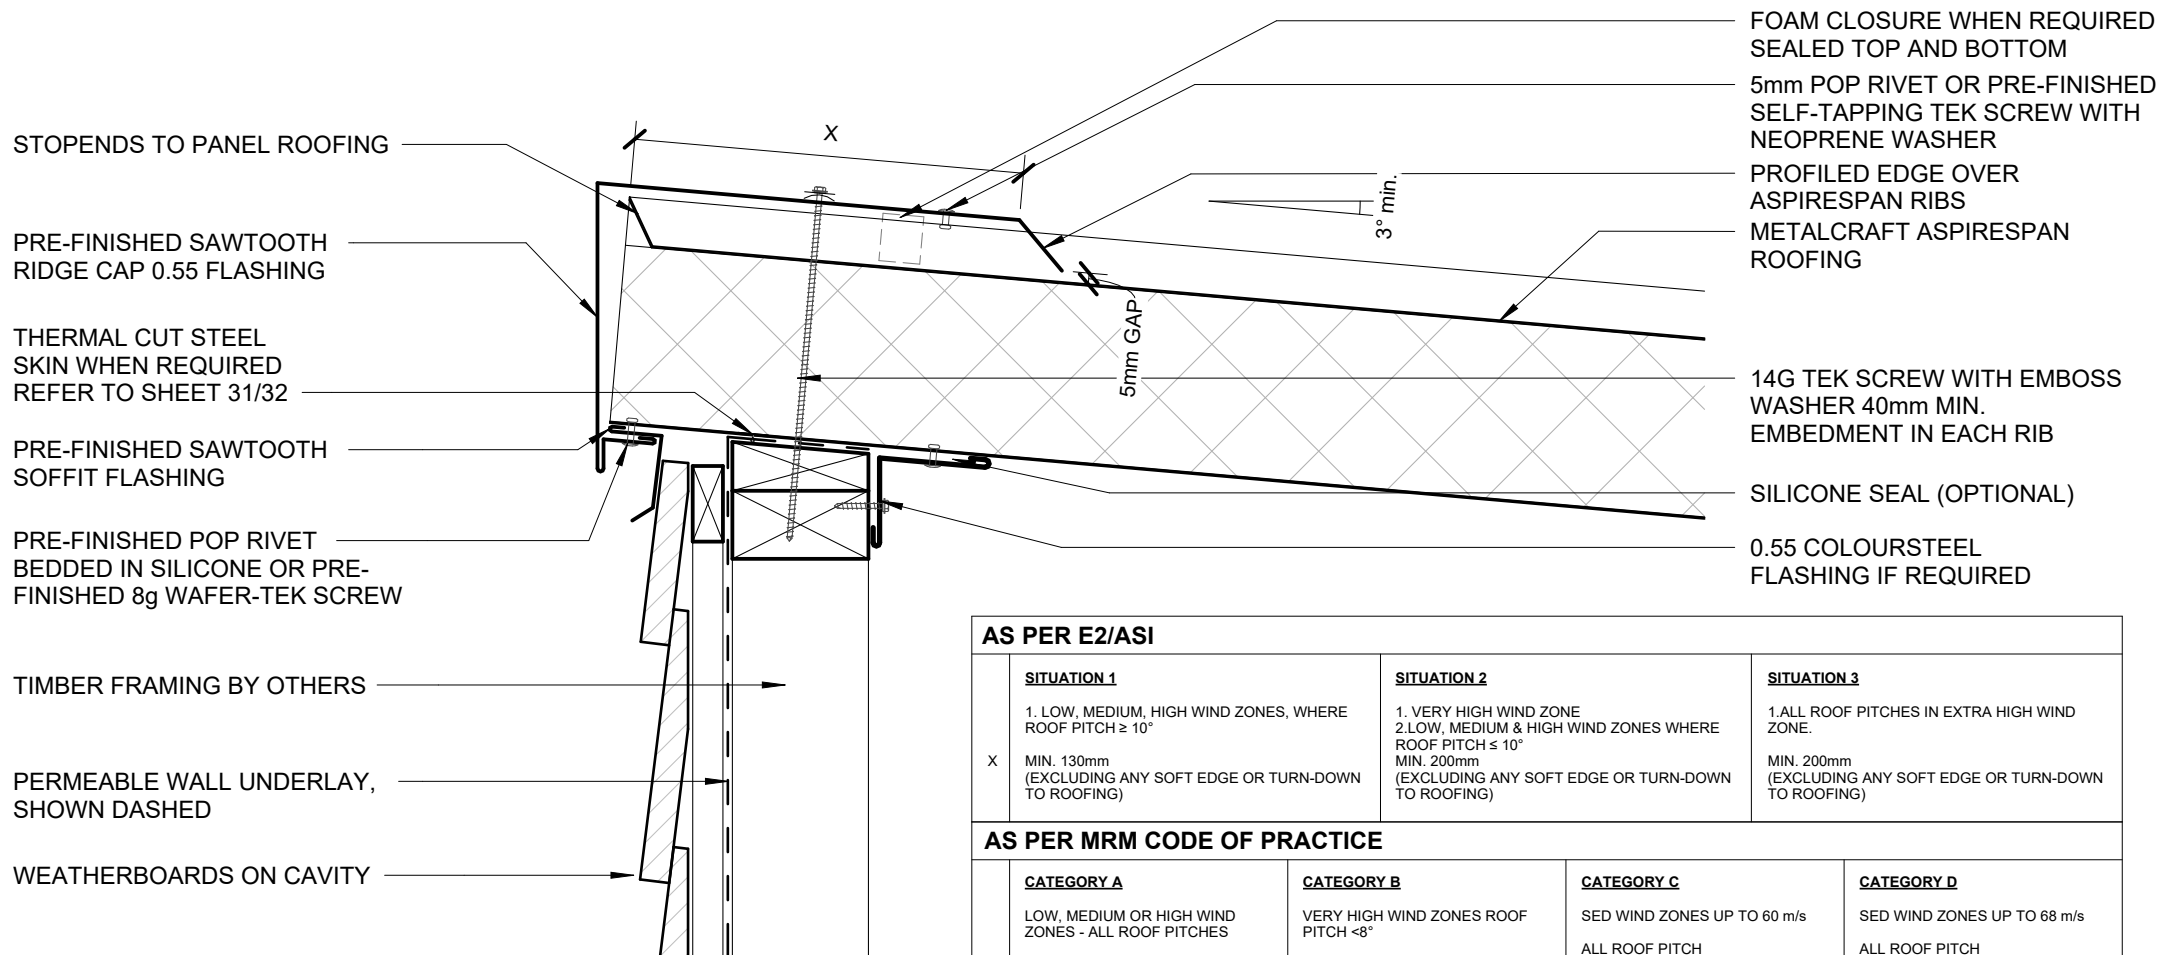


#### AS PER E2/ASI

	<u>SITUATION 1</u>	<u>SITUATION 2</u>	<u>SITUATION 3</u>
X	1. LOW, MEDIUM, HIGH WIND ZONES, WHERE ROOF PITCH $\geq 10^\circ$ MIN. 130mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)	1. VERY HIGH WIND ZONE 2. LOW, MEDIUM & HIGH WIND ZONES WHERE ROOF PITCH $\leq 10^\circ$ MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)	1. ALL ROOF PITCHES IN EXTRA HIGH WIND ZONE. MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)

#### AS PER MRM CODE OF PRACTICE

	<u>CATEGORY A</u>	<u>CATEGORY B</u>	<u>CATEGORY C</u>	<u>CATEGORY D</u>
X	LOW, MEDIUM OR HIGH WIND ZONES - ALL ROOF PITCHES  VERY HIGH AND EXTRA HIGH WIND ZONES WHERE THE PITCH IS EQUAL TO OR GREATER THAN $10^\circ$  MIN. 130mm	VERY HIGH WIND ZONES ROOF PITCH $< 8^\circ$  EXTRA HIGH WIND ZONES - ALL ROOF PITCHES  MIN. 200mm	SED WIND ZONES UP TO 60 m/s ALL ROOF PITCH  MIN. 200mm	SED WIND ZONES UP TO 68 m/s ALL ROOF PITCH  MIN. 200mm + BAFFLE (REFER NZ MRM COP)

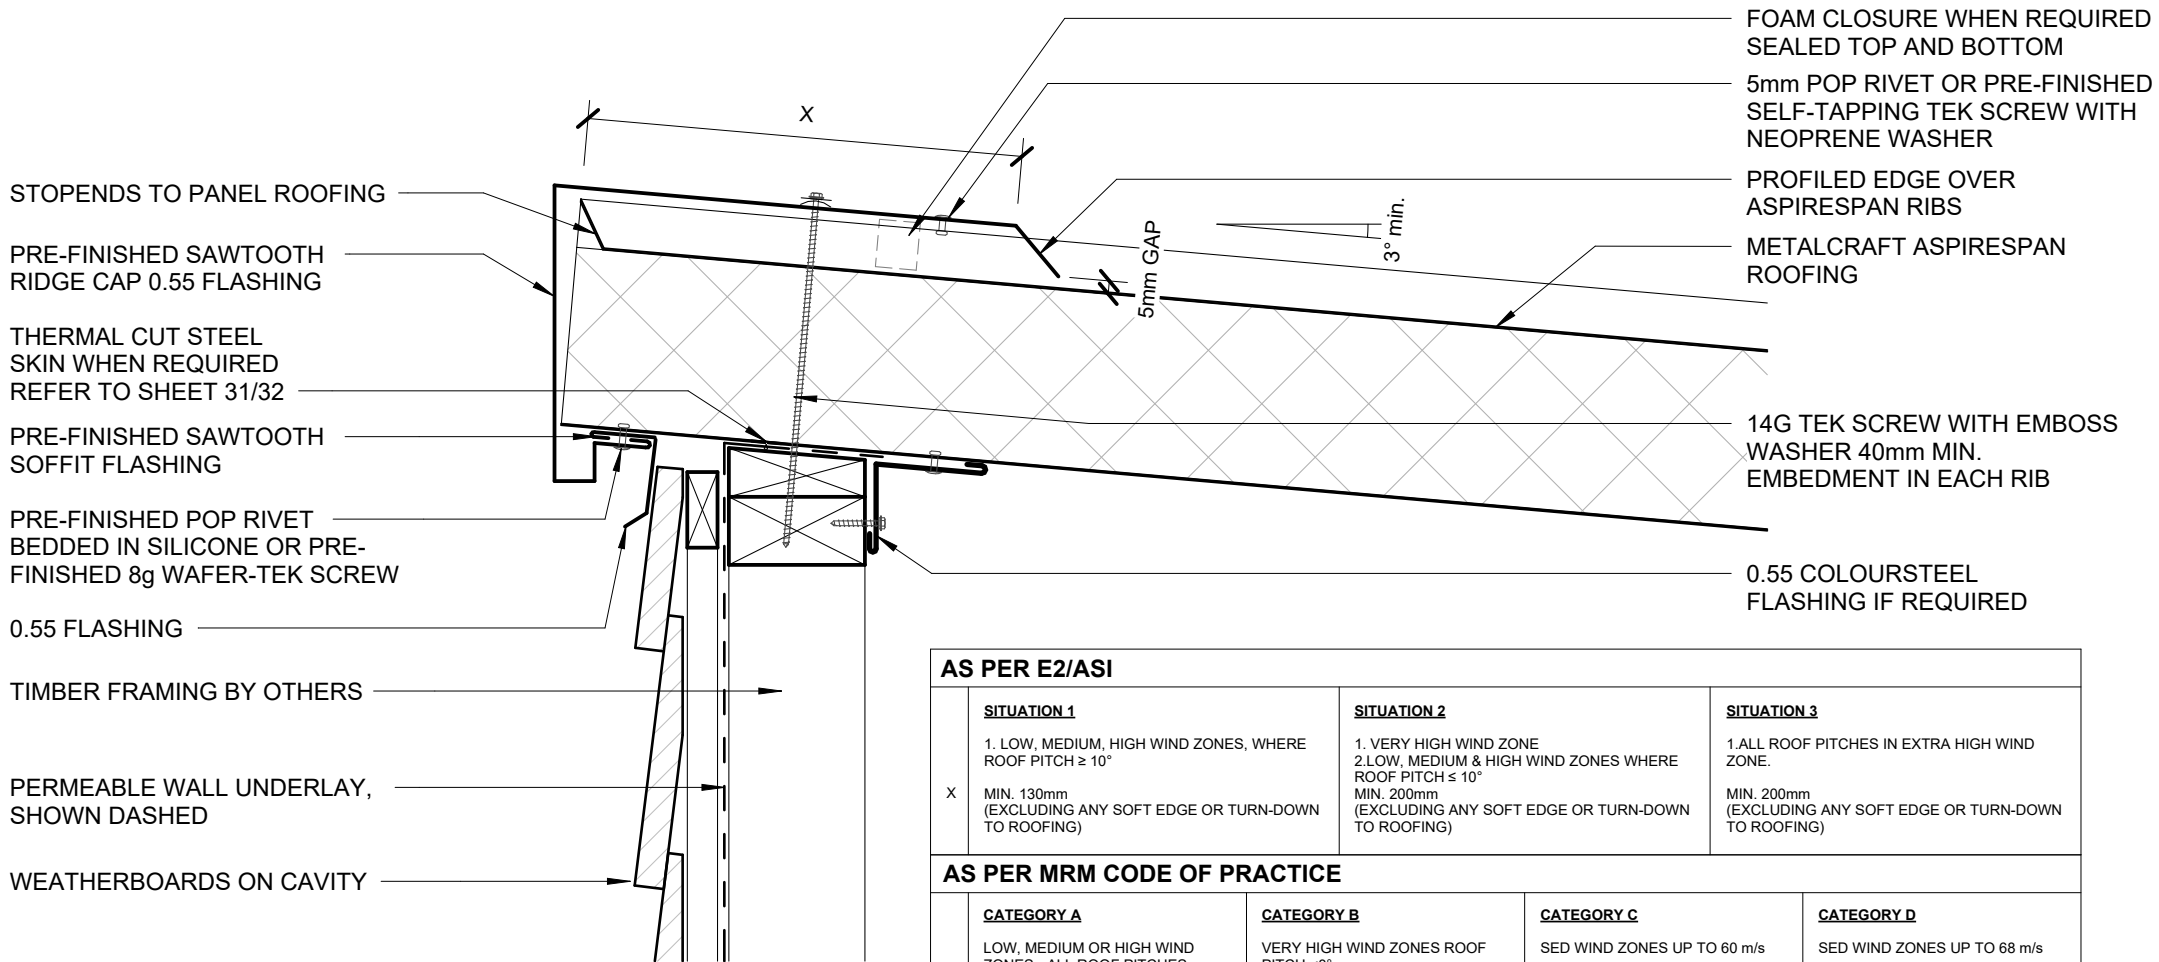


#### AS PER E2/ASI

	<u>SITUATION 1</u>	<u>SITUATION 2</u>	<u>SITUATION 3</u>
	1. LOW, MEDIUM, HIGH WIND ZONES, WHERE ROOF PITCH $\geq 10^\circ$	1. VERY HIGH WIND ZONE 2. LOW, MEDIUM & HIGH WIND ZONES WHERE ROOF PITCH $\leq 10^\circ$	1. ALL ROOF PITCHES IN EXTRA HIGH WIND ZONE.
X	MIN. 130mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)	MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)	MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)

#### AS PER MRM CODE OF PRACTICE


	<u>CATEGORY A</u>	<u>CATEGORY B</u>	<u>CATEGORY C</u>	<u>CATEGORY D</u>
	LOW, MEDIUM OR HIGH WIND ZONES - ALL ROOF PITCHES  VERY HIGH AND EXTRA HIGH WIND ZONES WHERE THE PITCH IS EQUAL TO OR GREATER THAN $10^\circ$	VERY HIGH WIND ZONES ROOF PITCH $< 8^\circ$  EXTRA HIGH WIND ZONES - ALL ROOF PITCHES	SED WIND ZONES UP TO 60 m/s  ALL ROOF PITCH	SED WIND ZONES UP TO 68 m/s  ALL ROOF PITCH
X	MIN. 130mm	MIN. 200mm	MIN. 200mm	MIN. 200mm + BAFFLE (REFER NZ MRM COP)

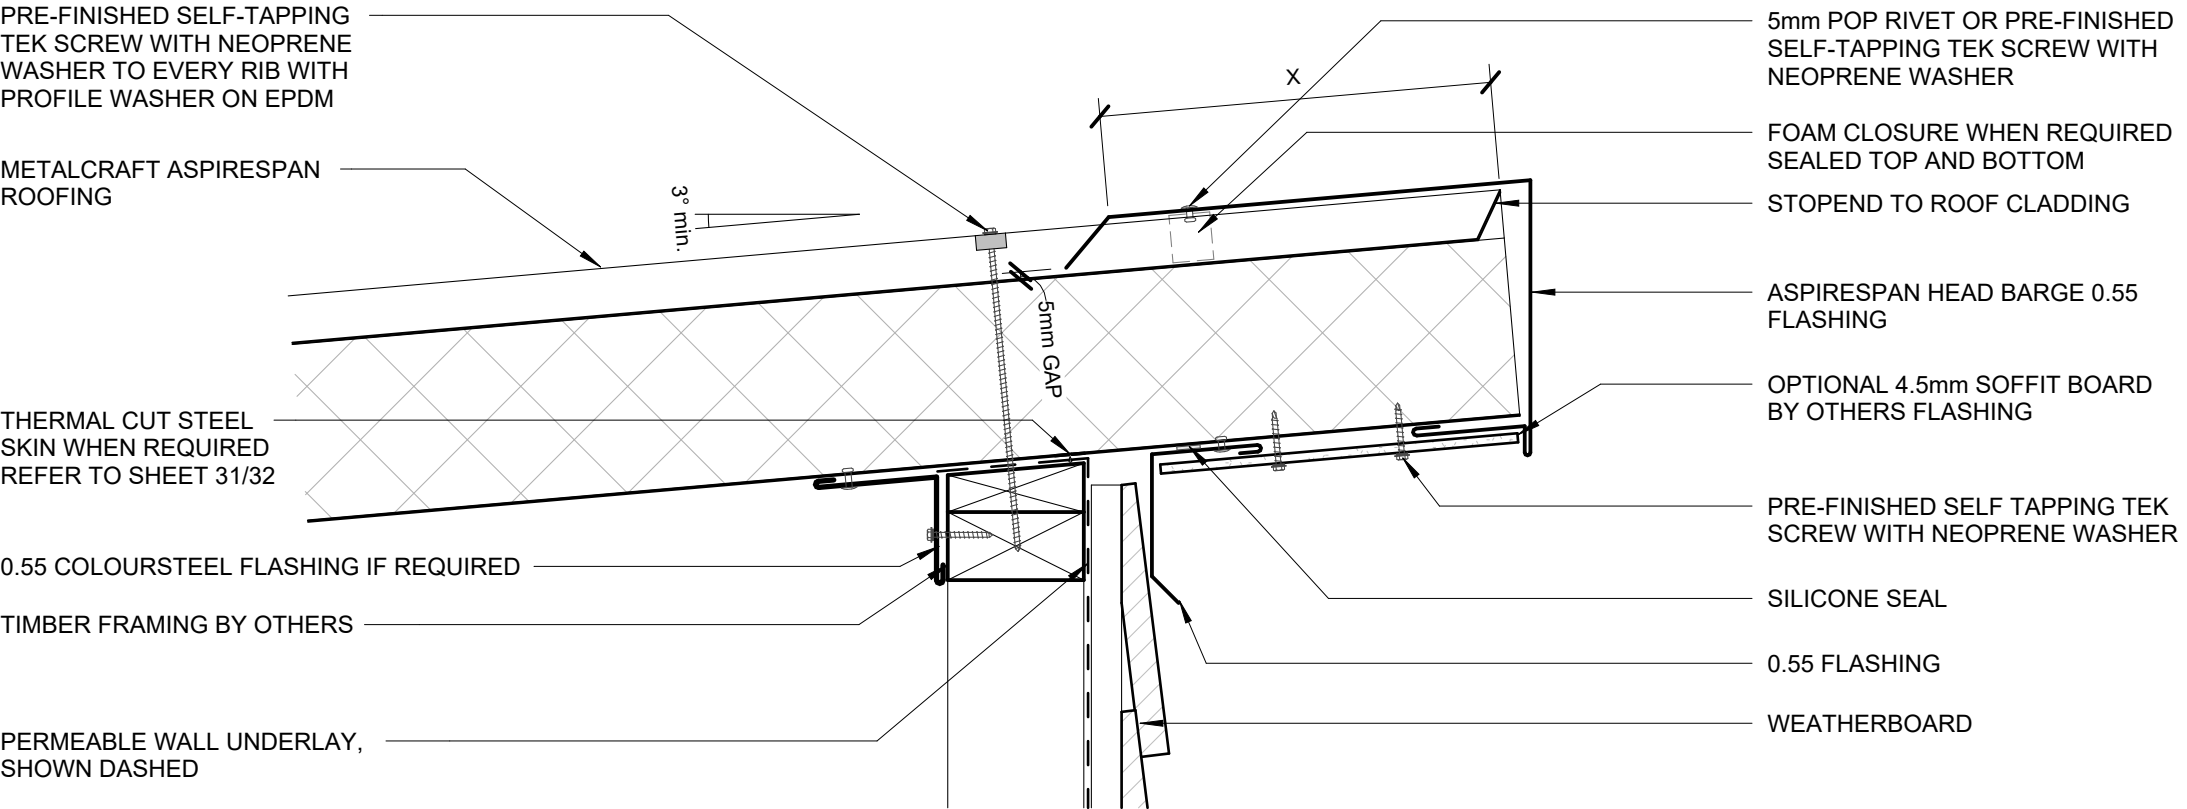

AS PER E2/ASI			
	SITUATION 1	SITUATION 2	SITUATION 3
	1. LOW, MEDIUM, HIGH WIND ZONES, WHERE ROOF PITCH ≥ 10°	1. VERY HIGH WIND ZONE 2. LOW, MEDIUM & HIGH WIND ZONES WHERE ROOF PITCH ≤ 10°	1. ALL ROOF PITCHES IN EXTRA HIGH WIND ZONE.
X	MIN. 130mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)	MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)	MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)

AS PER MRM CODE OF PRACTICE			
	CATEGORY A	CATEGORY B	CATEGORY C
	LOW, MEDIUM OR HIGH WIND ZONES - ALL ROOF PITCHES	VERY HIGH WIND ZONES ROOF PITCH <8°	SED WIND ZONES UP TO 60 m/s
	VERY HIGH AND EXTRA HIGH WIND ZONES WHERE THE PITCH IS EQUAL TO OR GREATER THAN 10°	EXTRA HIGH WIND ZONES - ALL ROOF PITCHES	ALL ROOF PITCH
X	MIN. 130mm	MIN. 200mm	MIN. 200mm

	CATEGORY D
	SED WIND ZONES UP TO 68 m/s
	ALL ROOF PITCH
	MIN. 200mm + BAFFLE (REFER NZ MRM COP)

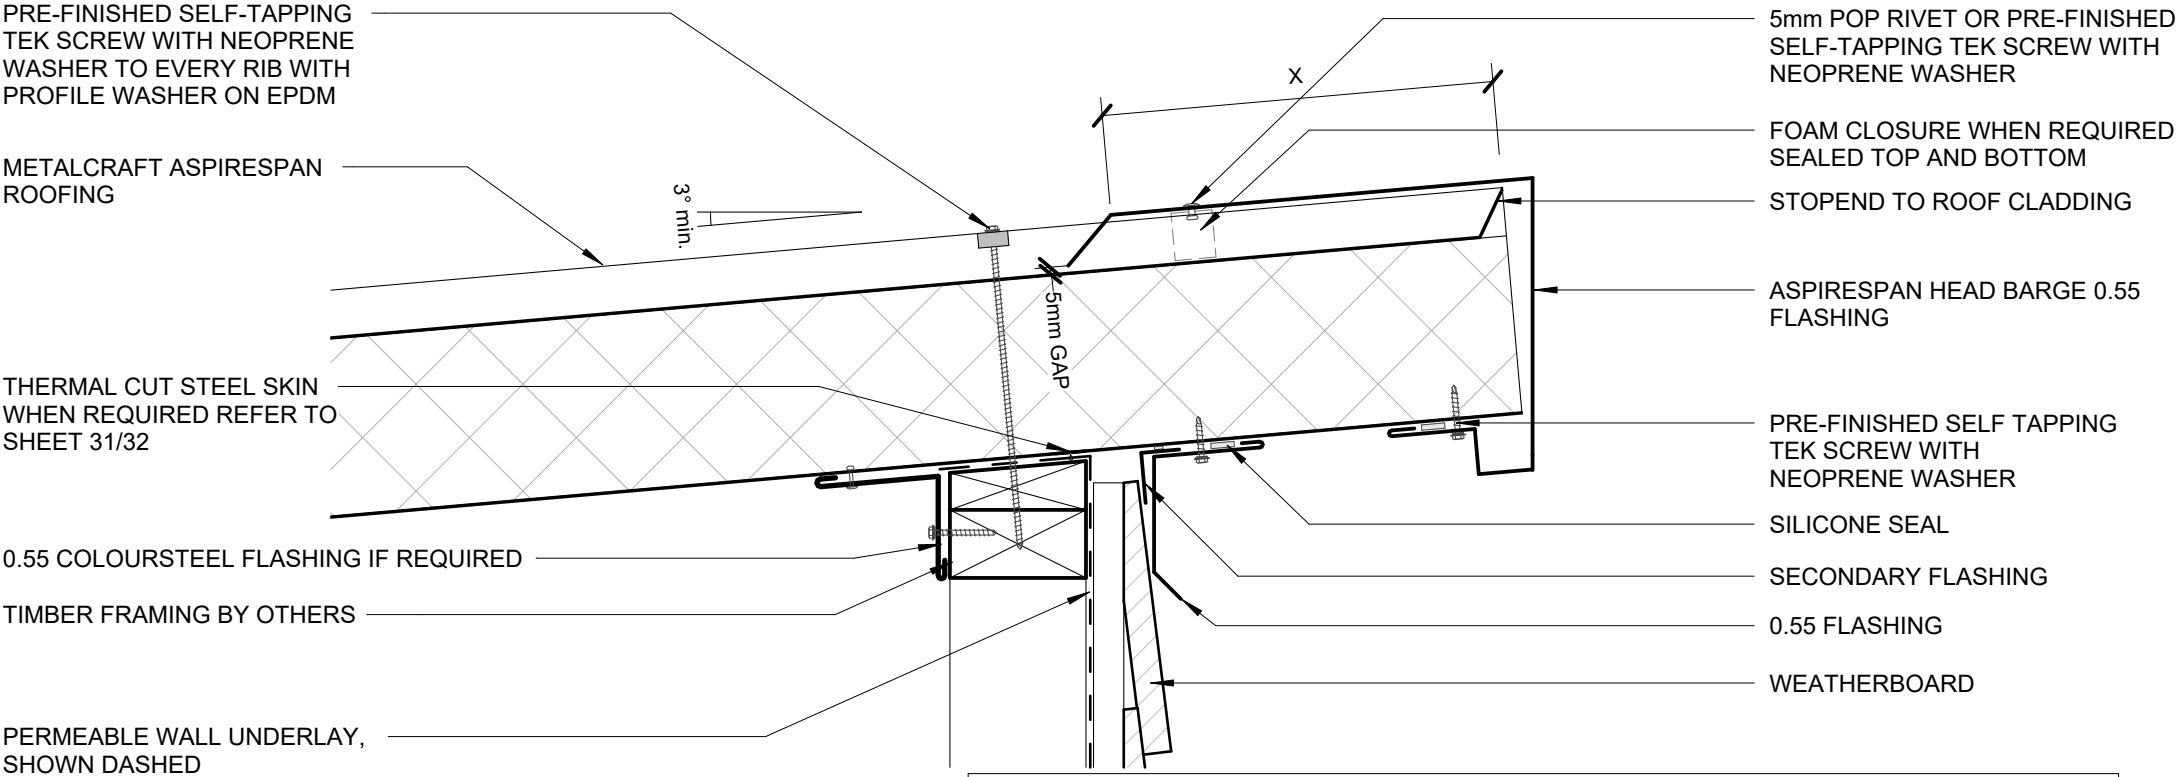


AS PER E2/ASI			
	SITUATION 1	SITUATION 2	SITUATION 3
	1. LOW, MEDIUM, HIGH WIND ZONES, WHERE ROOF PITCH $\geq 10^\circ$	1. VERY HIGH WIND ZONE 2. LOW, MEDIUM & HIGH WIND ZONES WHERE ROOF PITCH $\leq 10^\circ$	1. ALL ROOF PITCHES IN EXTRA HIGH WIND ZONE.
X	MIN. 130mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)	MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)	MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)

AS PER MRM CODE OF PRACTICE			
	CATEGORY A	CATEGORY B	CATEGORY C
	LOW, MEDIUM OR HIGH WIND ZONES - ALL ROOF PITCHES  VERY HIGH AND EXTRA HIGH WIND ZONES WHERE THE PITCH IS EQUAL TO OR GREATER THAN $10^\circ$	VERY HIGH WIND ZONES ROOF PITCH $<8^\circ$  EXTRA HIGH WIND ZONES - ALL ROOF PITCHES	SED WIND ZONES UP TO 60 m/s  ALL ROOF PITCH
X	MIN. 130mm	MIN. 200mm	MIN. 200mm

	CATEGORY D
	SED WIND ZONES UP TO 68 m/s  ALL ROOF PITCH
	MIN. 200mm + BAFFLE (REFER NZ MRM COP)

SAW TOOTH SOFFIT DETAIL 02

AspireSpan PIR      Rev. 1.1      RESIDENTIAL ROOFING

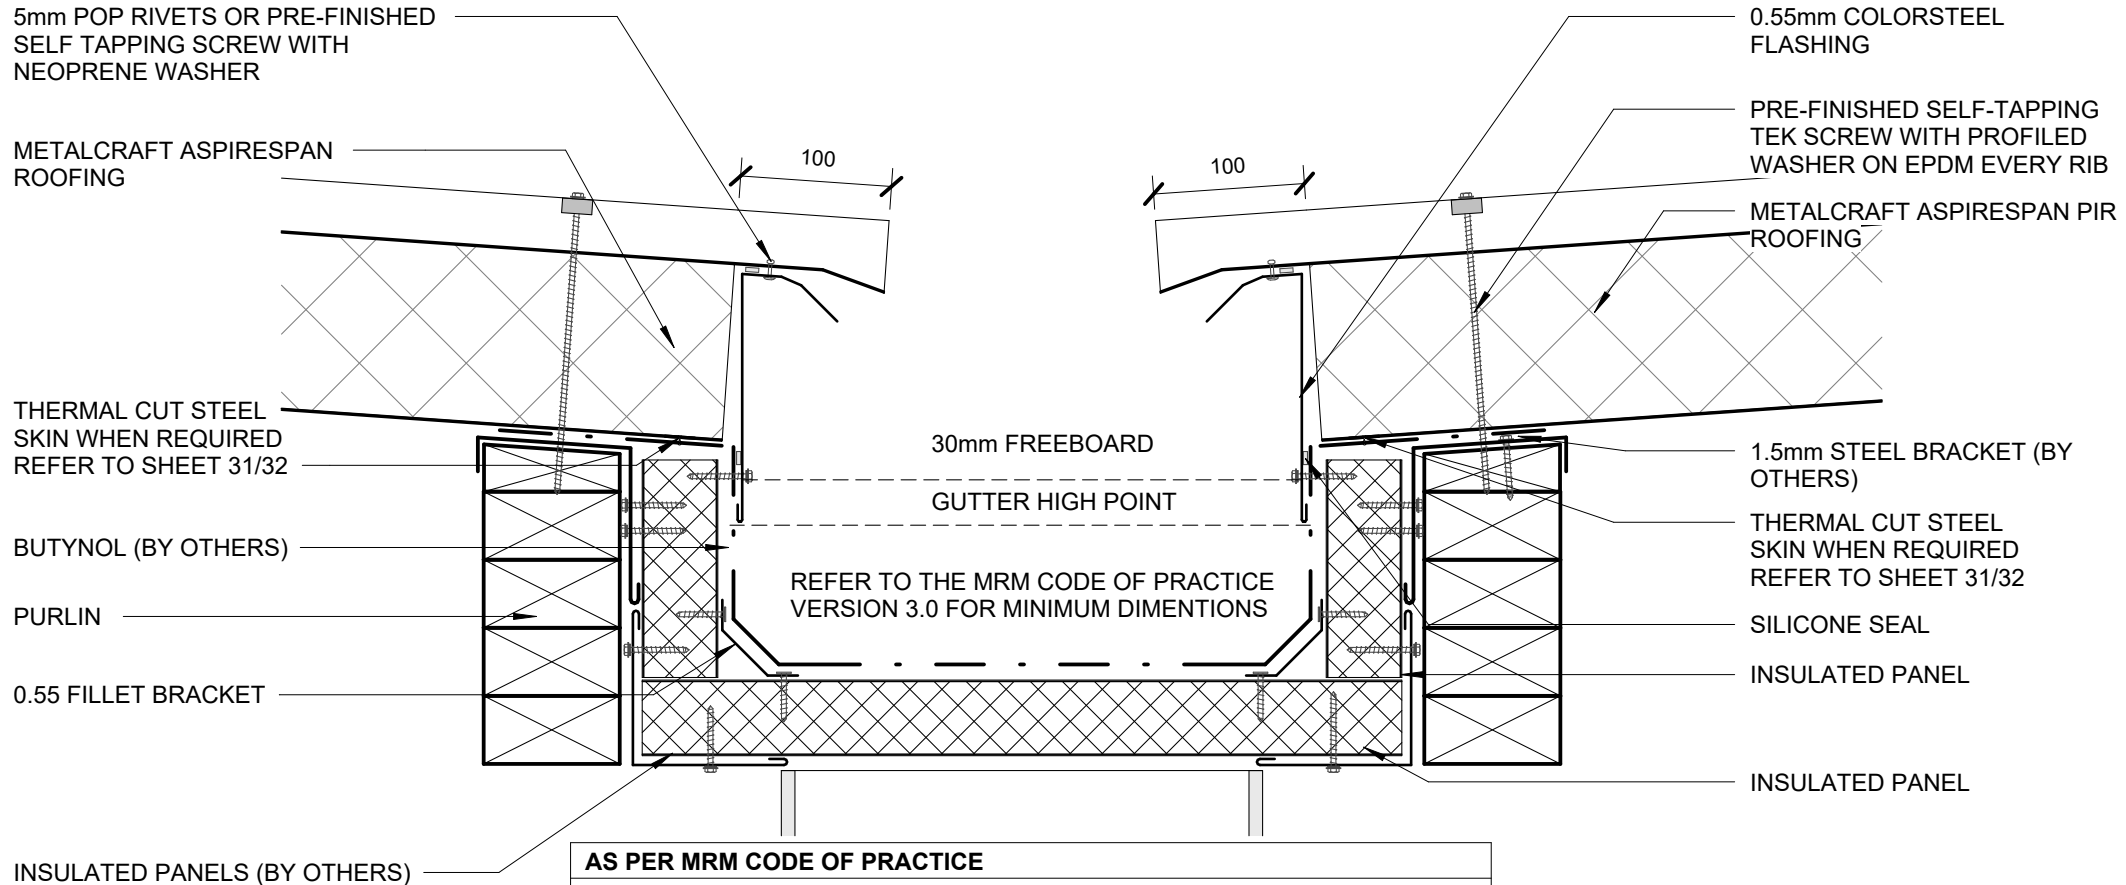


#### AS PER MRM CODE OF PRACTICE

1. NZMRM ALLOWS FOR CUSTOM INTERNAL GUTTER DESIGN.
2. THE ARCHITECT OR DESIGNER MUST SATISFY THEMSELVES WITH THE CORRECT INTERNAL GUTTER DESIGN FOR THEIR PROJECTS AND REFER TO THE NZMRM CODE OF PRACTICE FOR THE INTERNAL GUTTER CAPACITY CALCULATION TOOL AND ALTERNATIVE SOLUTIONS FOR PITCHES DOWN TO THAT OF THE ALLOWABLE PITCH OF THE SELECTED ROOFING PROFILE.
3. INTERNAL GUTTERS MUST INCORPORATE ALLOWANCE FOR FREEBOARD OF 30mm
4. REFER NZMRM CODE OF PRACTICE FOR MORE INFORMATION ON INTERNAL GUTTER DESIGNS.

#### AS PER E2/AS1

1. THE ARCHITECT OR DESIGNER CAN CHOOSE TO DESIGN IN ACCORDANCE WITH E2/AS1.

ROOF PITCH FOR VALLEYS AS  
PER MRM CODE OF PRACTICE  
VERSION 3.0

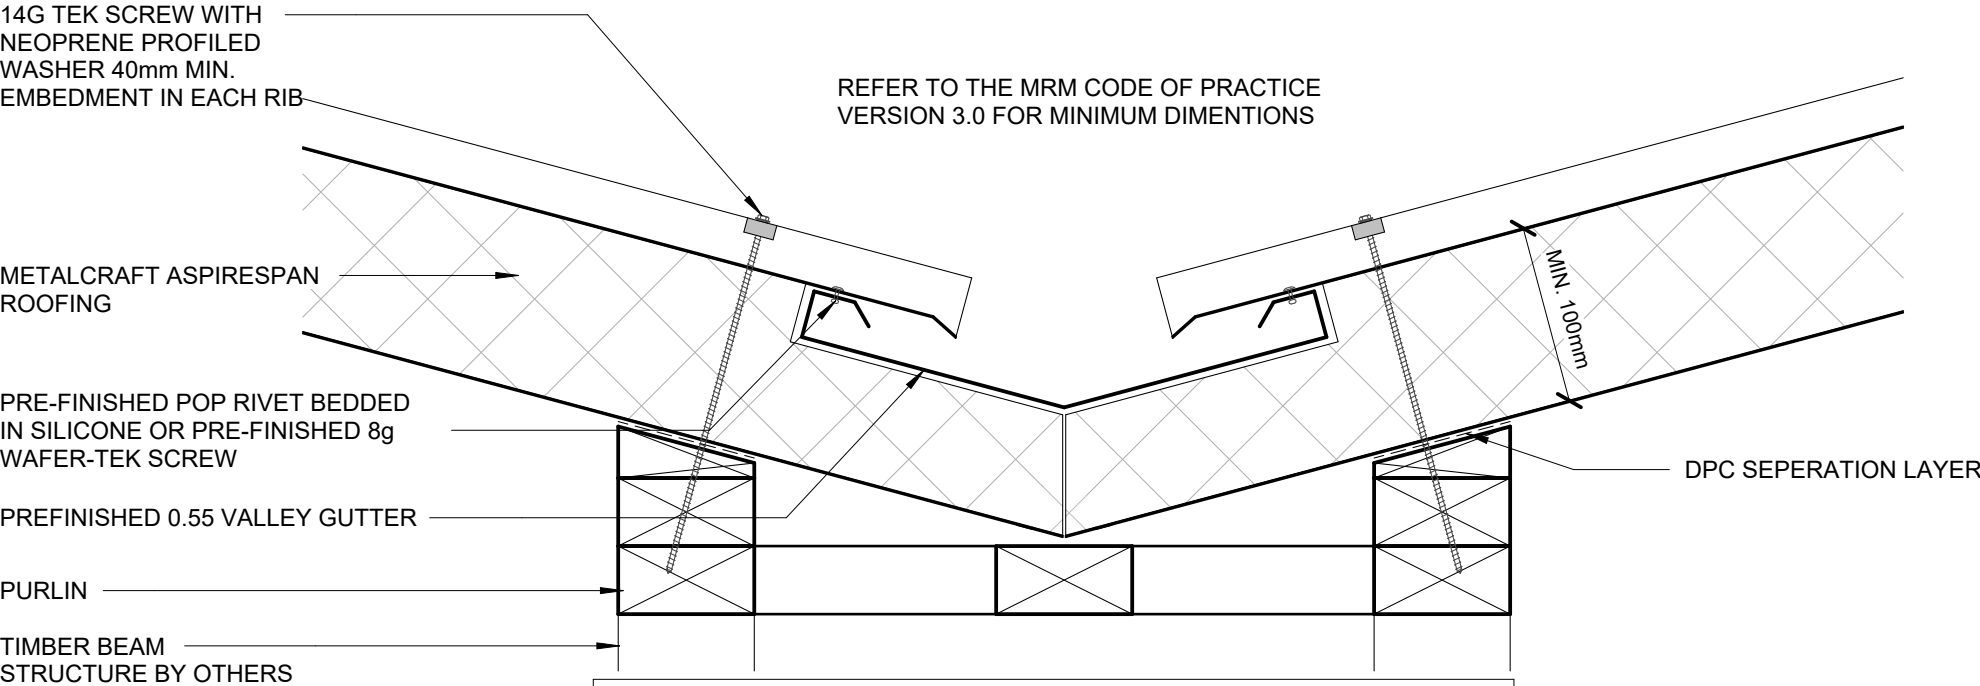


**AS PER MRM CODE OF PRACTICE**

1. NZMRM ALLOWS FOR CUSTOM GUTTER DESIGN.
2. THE ARCHITECT OR DESIGNER MUST SATISFY THEMSELVES WITH THE CORRECT VALLEY DESIGN FOR THEIR PROJECTS AND REFER TO THE NZMRM CODE OF PRACTICE FOR THE VALLEY CAPACITY CALCULATION TOOL AND ALTERNATIVE SOLUTIONS FOR PITCHES DOWN TO THAT OF THE ALLOWABLE PITCH OF THE SELECTED ROOFING PROFILE.
3. INTERNAL ANGLES OF VALLEYS AS PER NZMRM CODE OF PRACTICE.
4. VALLEYS MUST INCORPORATE ALLOWANCE FOR FREEBOARD AND FOR PITCHES UP TO 8 DEGREES A MINIMUM FREEBOARD REQUIREMENT OF 20mm IS REQUIRED. FOR PITCHES GREATER THAN 8 DEGREES A FREEBOARD OF 15mm IS REQUIRED.
5. REFER NZMRM CODE OF PRACTICE FOR MORE INFORMATION ON VALLEY DESIGNS.

**AS PER E2/AS1**

1. THE ARCHITECT OR DESIGNER CAN CHOOSE TO DESIGN IN ACCORDANCE WITH E2/AS1.

ROOF PITCH FOR VALLEYS AS PER MRM CODE OF PRACTICE VERSION 3.0

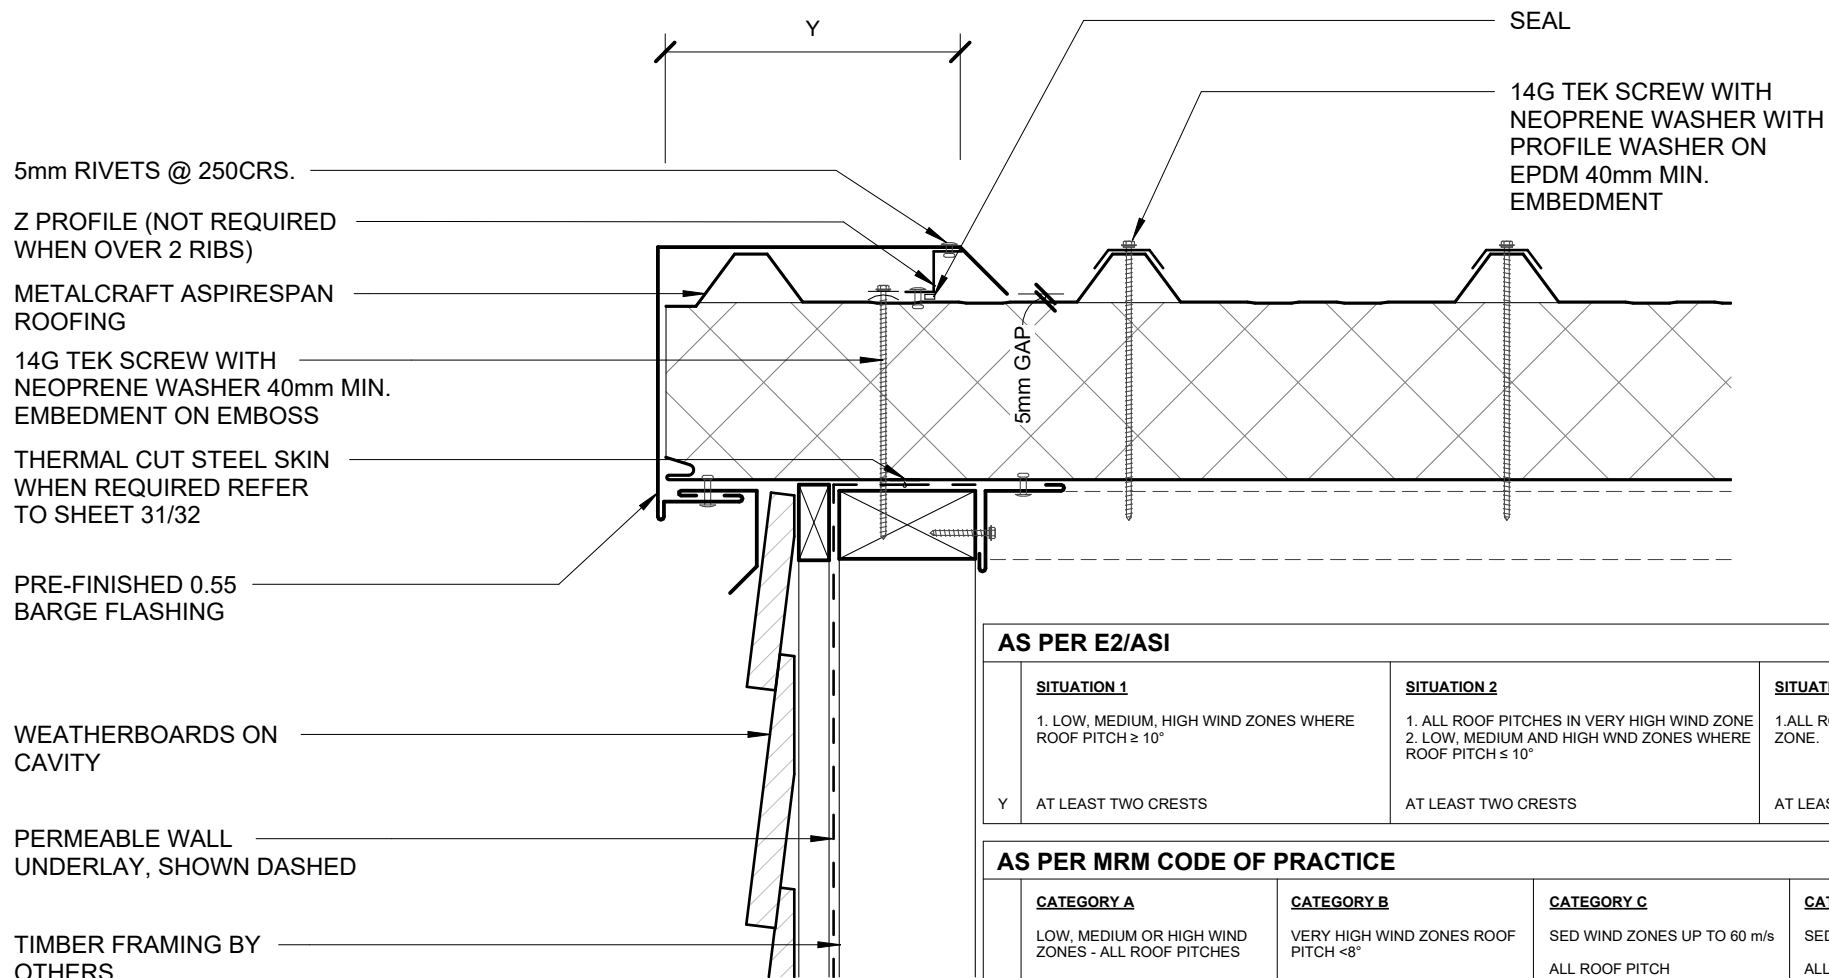


#### AS PER E2/ASI

	<u>SITUATION 1</u>	<u>SITUATION 2</u>	<u>SITUATION 3</u>
	1. LOW, MEDIUM, HIGH WIND ZONES WHERE ROOF PITCH $\geq 10^\circ$	1. ALL ROOF PITCHES IN VERY HIGH WIND ZONE 2. LOW, MEDIUM AND HIGH WIND ZONES WHERE ROOF PITCH $\leq 10^\circ$	1. ALL ROOF PITCHES IN EXTRA HIGH WIND ZONE.
Y	AT LEAST TWO CRESTS	AT LEAST TWO CRESTS	AT LEAST TWO CRESTS

#### AS PER MRM CODE OF PRACTICE

	<u>CATEGORY A</u>	<u>CATEGORY B</u>	<u>CATEGORY C</u>	<u>CATEGORY D</u>
	LOW, MEDIUM OR HIGH WIND ZONES - ALL ROOF PITCHES  VERY HIGH AND EXTRA HIGH WIND ZONES WHERE THE PITCH IS EQUAL TO OR GREATER THAN $10^\circ$	VERY HIGH WIND ZONES ROOF PITCH $< 8^\circ$  EXTRA HIGH WIND ZONES - ALL ROOF PITCHES	SED WIND ZONES UP TO 60 m/s  ALL ROOF PITCH	SED WIND ZONES UP TO 68 m/s  ALL ROOF PITCH
Y	TRAPEZOIDAL & TRAY: ONE RIB  CORRUGATE: 2 CORRUGATIONS	TRAPEZOIDAL & TRAY: TWO RIBS (20mm - 34mm)* ONE RIB ( $> 34\text{mm}$ )*  CORRUGATE: 2 CORRUGATIONS	TRAPEZOIDAL & TRAY: TWO RIBS (20mm - 34mm)* ONE RIB ( $> 34\text{mm}$ )*  CORRUGATE: 3 CORRUGATIONS	TRAPEZOIDAL & TRAY: TWO RIBS (20mm - 34mm)* + UNDERSOAKER ONE RIB ( $> 34\text{mm}$ )* + UNDERSOAKER  CORRUGATE: 2 CORRUGATIONS + UNDERSOAKER

\* RIB HEIGHT OF PROFILE OR TURNUP

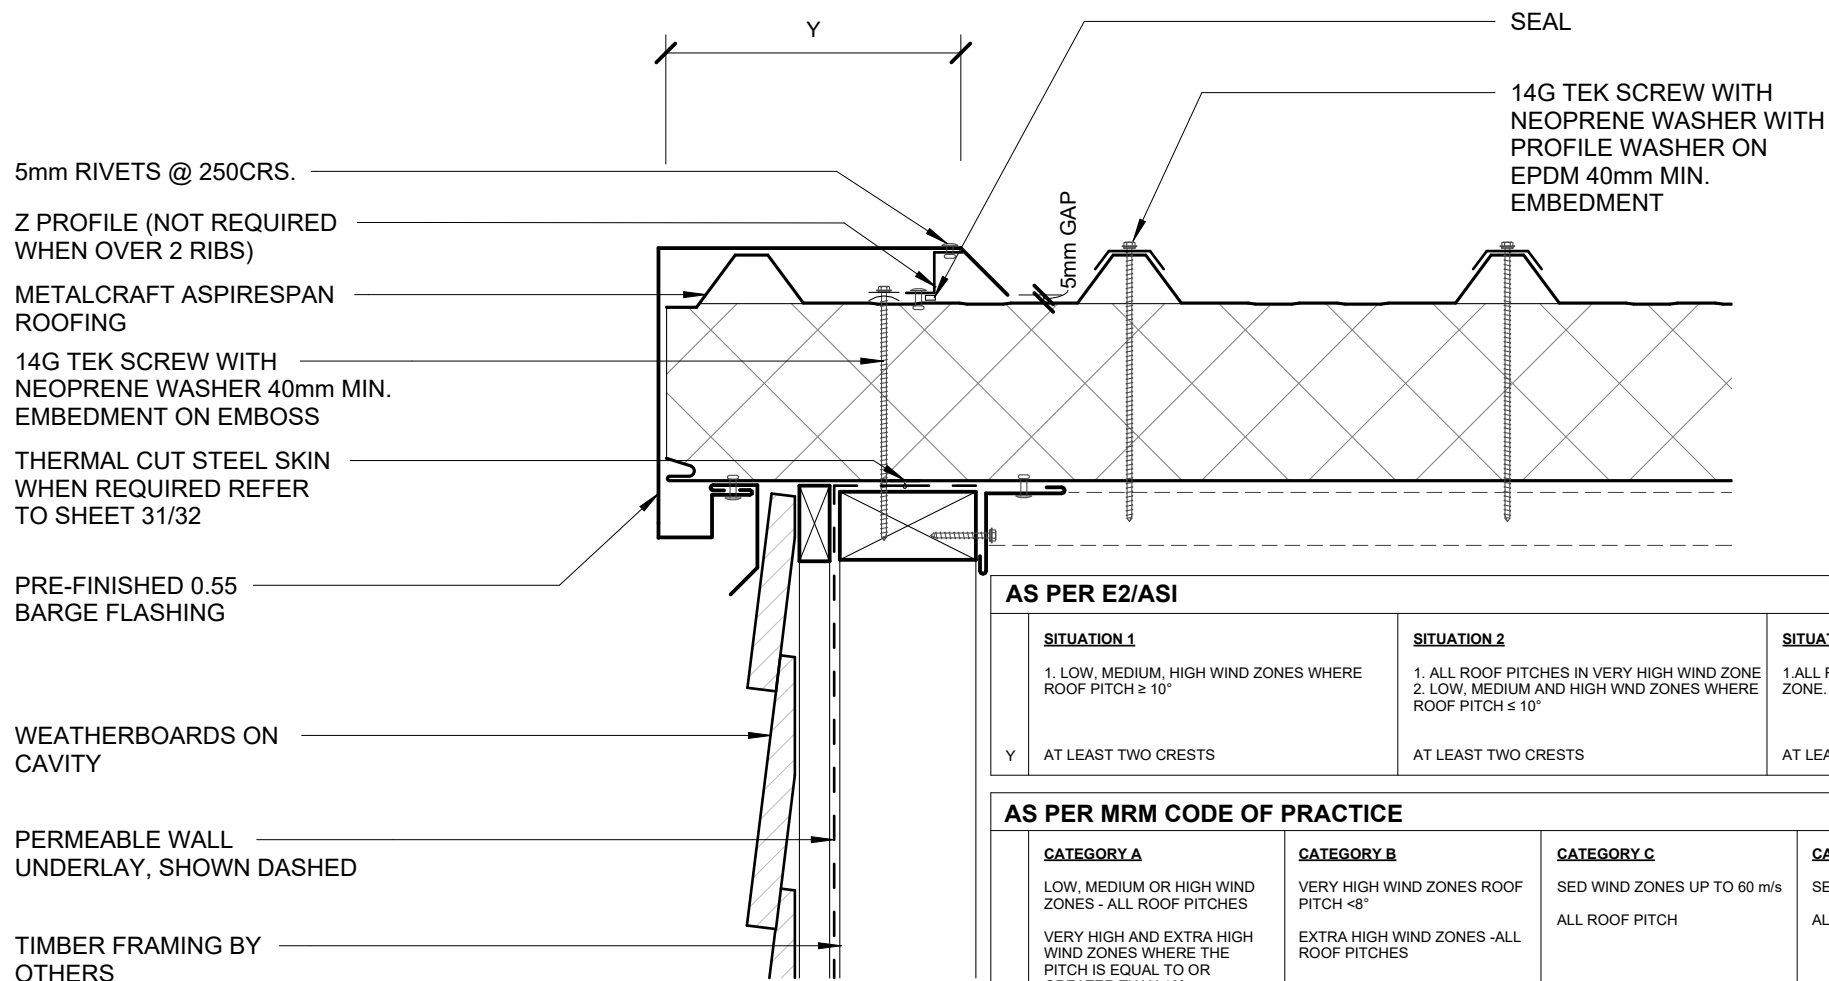


#### AS PER E2/ASI


SITUATION 1	SITUATION 2	SITUATION 3
1. LOW, MEDIUM, HIGH WIND ZONES WHERE ROOF PITCH $\geq 10^\circ$	1. ALL ROOF PITCHES IN VERY HIGH WIND ZONE 2. LOW, MEDIUM AND HIGH WND ZONES WHERE ROOF PITCH $\leq 10^\circ$	1. ALL ROOF PITCHES IN EXTRA HIGH WIND ZONE.
Y AT LEAST TWO CRESTS	AT LEAST TWO CRESTS	AT LEAST TWO CRESTS

#### AS PER MRM CODE OF PRACTICE

CATEGORY A	CATEGORY B	CATEGORY C	CATEGORY D
LOW, MEDIUM OR HIGH WIND ZONES - ALL ROOF PITCHES  VERY HIGH AND EXTRA HIGH WIND ZONES WHERE THE PITCH IS EQUAL TO OR GREATER THAN $10^\circ$	VERY HIGH WIND ZONES ROOF PITCH $< 8^\circ$  EXTRA HIGH WIND ZONES - ALL ROOF PITCHES	SED WIND ZONES UP TO 60 m/s  ALL ROOF PITCH	SED WIND ZONES UP TO 68 m/s  ALL ROOF PITCH
Y TRAPEZOIDAL & TRAY: ONE RIB  CORRUGATE: 2 CORRUGATIONS	TRAPEZOIDAL & TRAY: TWO RIBS (20mm - 34mm)* ONE RIB ( $> 34$ mm)*  CORRUGATE: 2 CORRUGATIONS	TRAPEZOIDAL & TRAY: TWO RIBS (20mm - 34mm)* ONE RIB ( $> 34$ mm)*  CORRUGATE: 3 CORRUGATIONS	TRAPEZOIDAL & TRAY: TWO RIBS (20mm - 34mm)* + UNDERSOAKER ONE RIB ( $> 34$ mm)* + UNDERSOAKER  CORRUGATE: 2 CORRUGATIONS + UNDERSOAKER

\* RIB HEIGHT OF PROFILE OR TURNUP

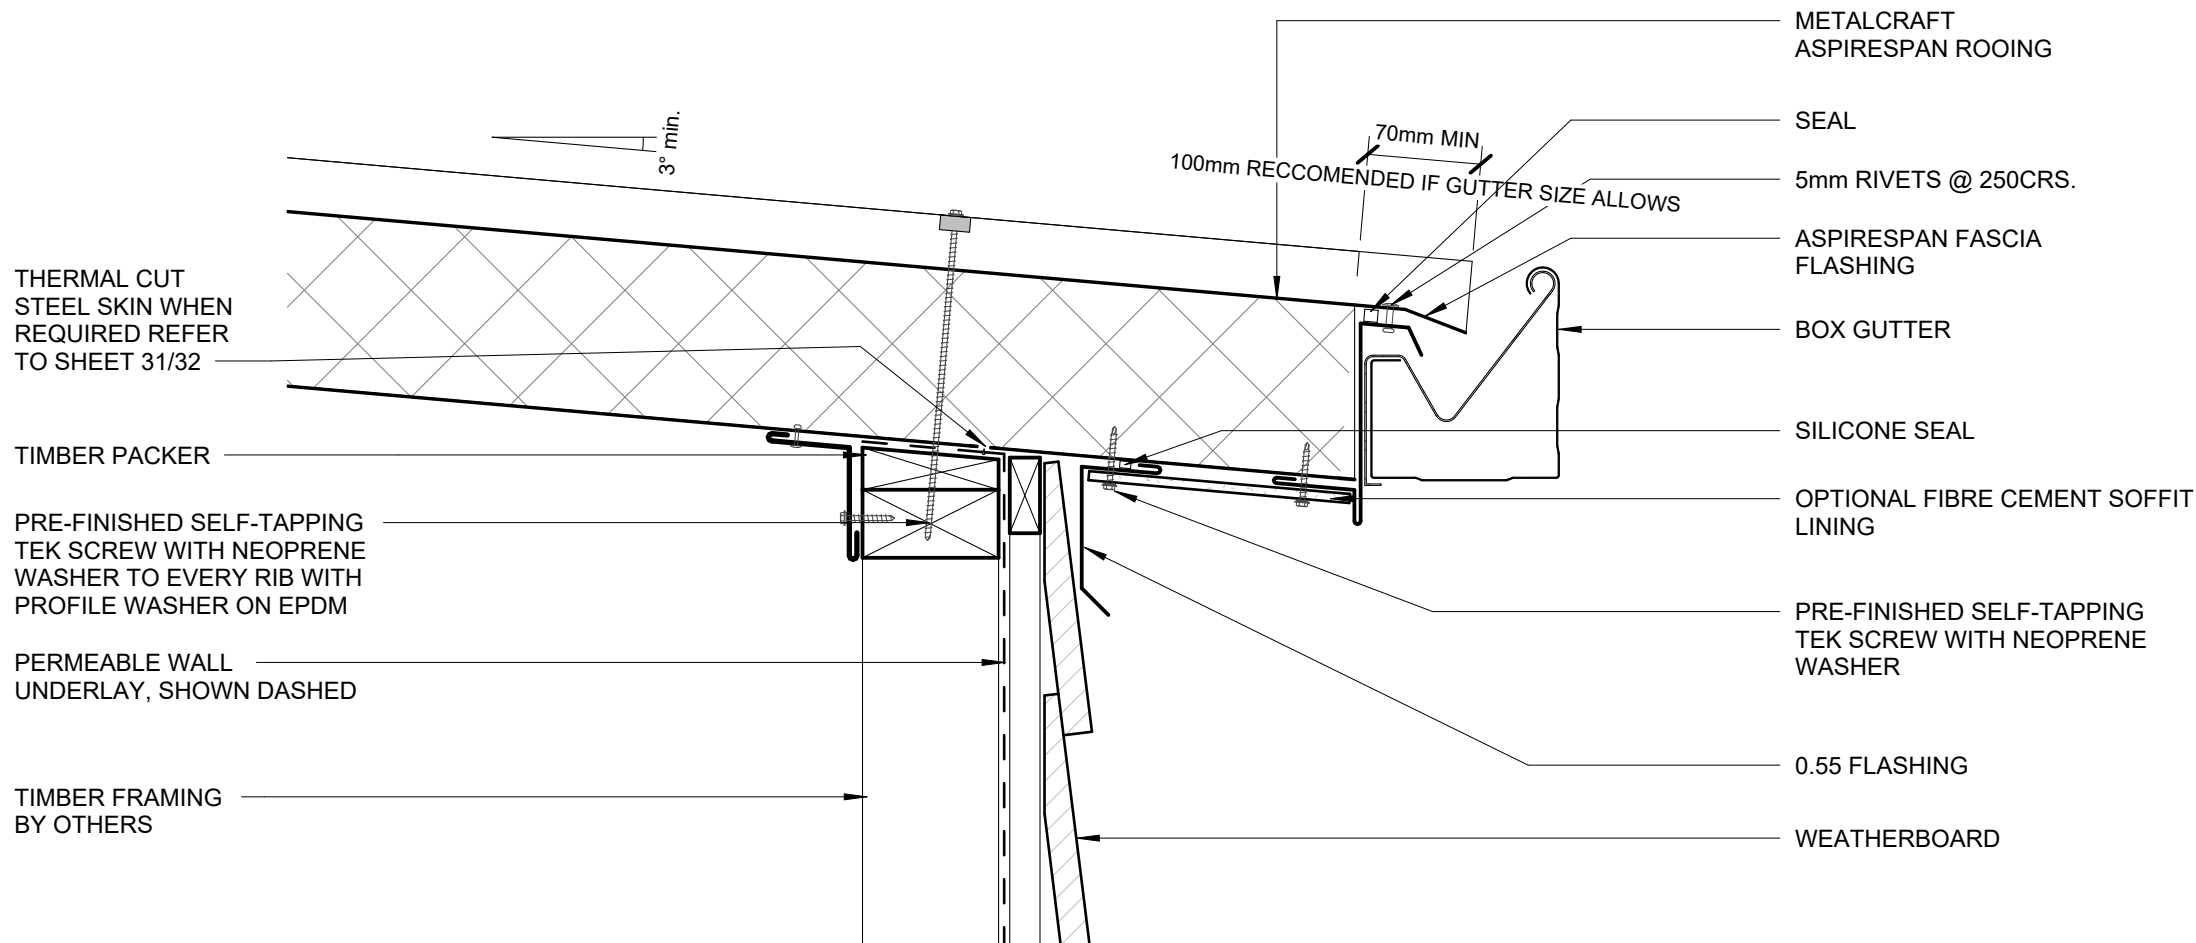

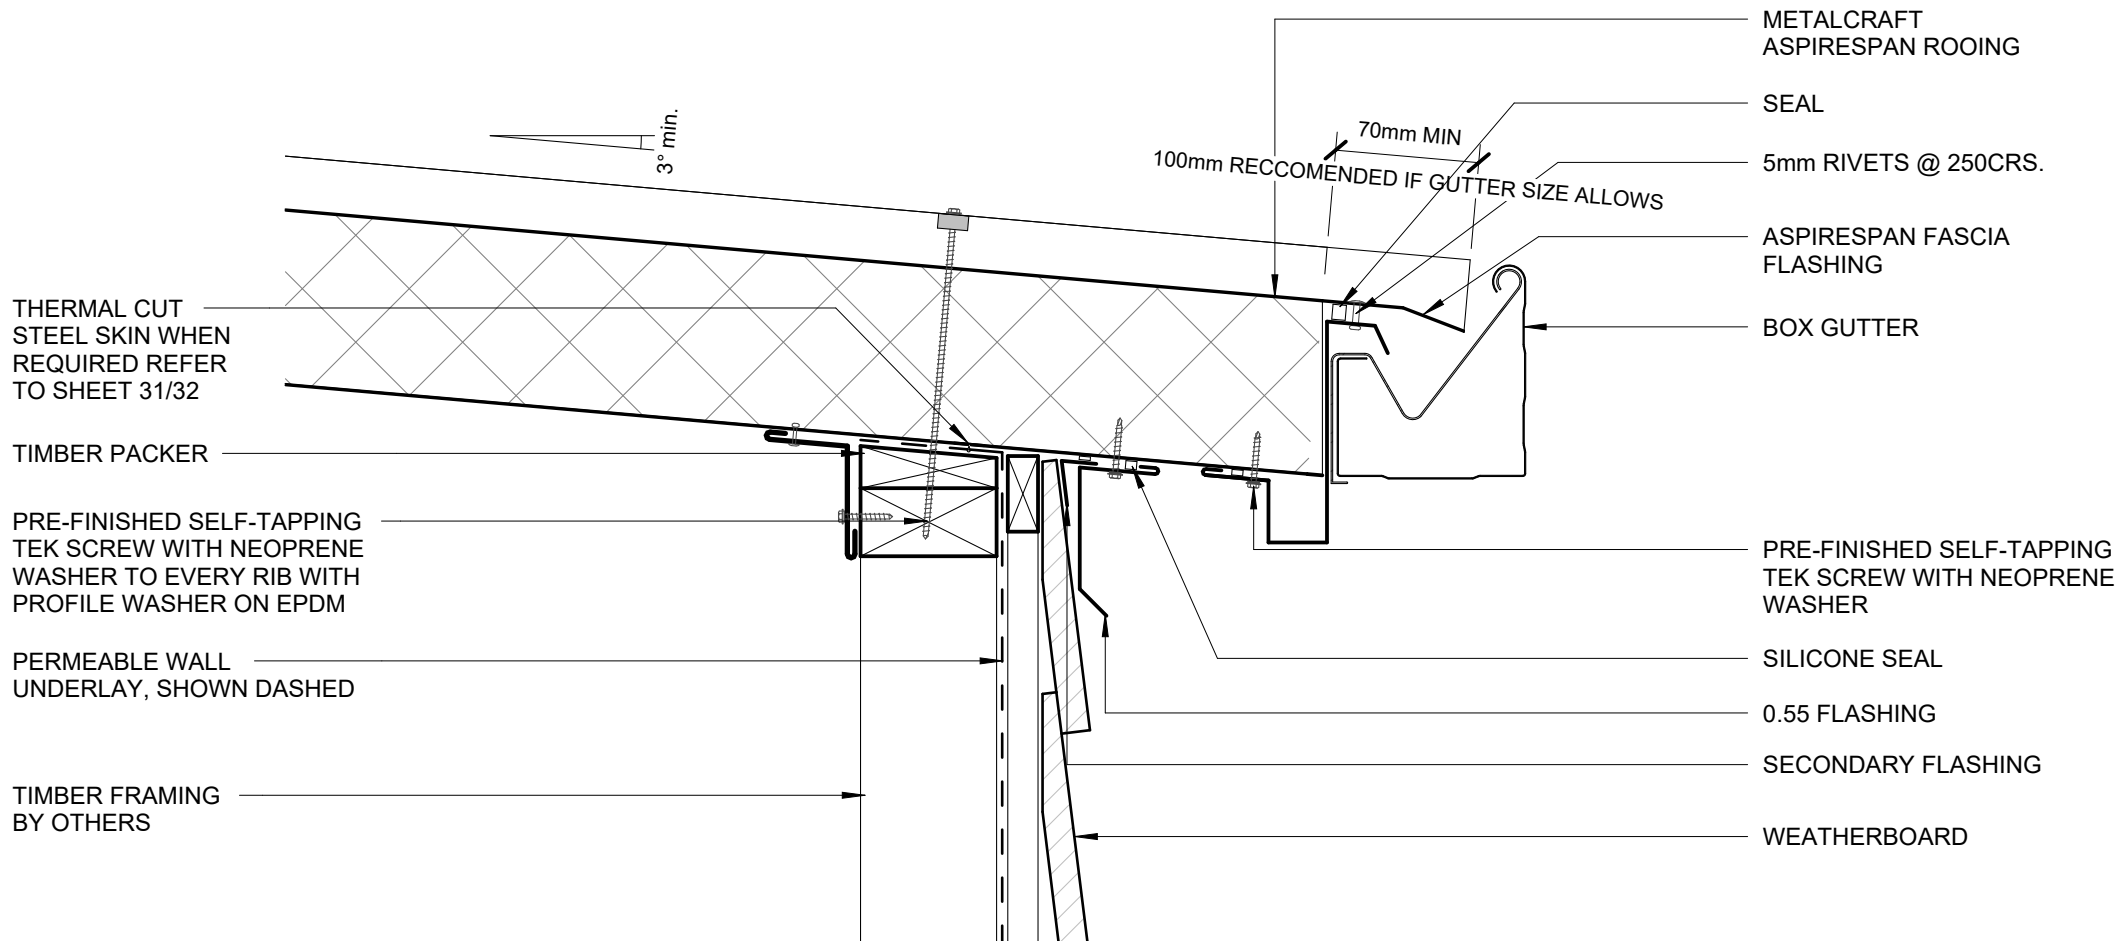

0.55 Z PROFILE FLASHING  
(NOT REQUIRED WHEN  
SPANNING 2 RIBS)

SEAL

METALCRAFT  
ASPIRESPAN ROOFING

ASPIRESPAN  
HEAD 0.55 BARGE  
FLASHING

THERMAL CUT STEEL SKIN  
WHEN REQUIRED REFER  
TO SHEET 31/32

14G SELF TAPPING TEK SCREW  
WITH NEOPRENE WASHER

SILICONE SEAL

0.55 FLASHING

WEATHERBOARDS  
ON CAVITY

PERMEABLE WALL  
UNDERLAY, SHOWN  
DASHED

PRE-FINISHED SELF-TAPPING TEK SCREW WITH NEOPRENE  
WASHER TO EVERY RIB WITH PROFILE WASHER ON EPDM

5mm GAP

0.55 FLASHING

TIMBER FRAME BY OTHERS

AS PER E2/ASI

SITUATION 1	SITUATION 2	SITUATION 3
1. LOW, MEDIUM, HIGH WIND ZONES WHERE ROOF PITCH $\geq 10^\circ$	1. ALL ROOF PITCHES IN VERY HIGH WIND ZONE 2. LOW, MEDIUM AND HIGH WIND ZONES WHERE ROOF PITCH $\leq 10^\circ$	1. ALL ROOF PITCHES IN EXTRA HIGH WIND ZONE.
Y AT LEAST TWO CRESTS	AT LEAST TWO CRESTS	AT LEAST TWO CRESTS

AS PER MRM CODE OF PRACTICE

CATEGORY A	CATEGORY B	CATEGORY C	CATEGORY D
LOW, MEDIUM OR HIGH WIND ZONES - ALL ROOF PITCHES  VERY HIGH AND EXTRA HIGH WIND ZONES WHERE THE PITCH IS EQUAL TO OR GREATER THAN $10^\circ$	VERY HIGH WIND ZONES ROOF PITCH $< 8^\circ$  EXTRA HIGH WIND ZONES -ALL ROOF PITCHES	SED WIND ZONES UP TO 60 m/s  ALL ROOF PITCH	SED WIND ZONES UP TO 68 m/s  ALL ROOF PITCH
Y TRAPEZOIDAL & TRAY: ONE RIB  CORRUGATE: 2 CORRUGATIONS	TRAPEZOIDAL & TRAY: TWO RIBS (20mm - 34mm)* ONE RIB ( $> 34\text{mm}$ )*  CORRUGATE: 2 CORRUGATIONS	TRAPEZOIDAL & TRAY: TWO RIBS (20mm - 34mm)* ONE RIB ( $> 34\text{mm}$ )*  CORRUGATE: 3 CORRUGATIONS	TRAPEZOIDAL & TRAY: TWO RIBS (20mm - 34mm)* + UNDERSOAKER ONE RIB ( $> 34\text{mm}$ )* + UNDERSOAKER  CORRUGATE: 2 CORRUGATIONS + UNDERSOAKER

\* RIB HEIGHT OF PROFILE OR TURNUP

PRE-FINISHED SELF-TAPPING  
TEK SCREW WITH NEOPRENE  
WASHER TO EVERY RIB WITH  
PROFILE WASHER ON EPDM

0.55 Z PROFILE FLASHING  
(NOT REQUIRED WHEN  
SPANNING 2 RIBS)

SEAL

METALCRAFT ASPIRESPAN  
ROOFING

ASPIRESPAN HEAD  
0.55 BARGE FLASHING

THERMAL CUT STEEL SKIN  
WHEN REQUIRED REFER TO  
SHEET 31/32

SILICONE SEAL

14G SELF TAPPING TEK SCREW WITH  
NEOPRENE WASHER


0.55 FLASHING

SECONDARY FLASHING

WEATHERBOARDS ON CAVITY

PERMEABLE WALL UNDERLAY,  
SHOWN DASHED

TIMBER FRAME BY OTHERS

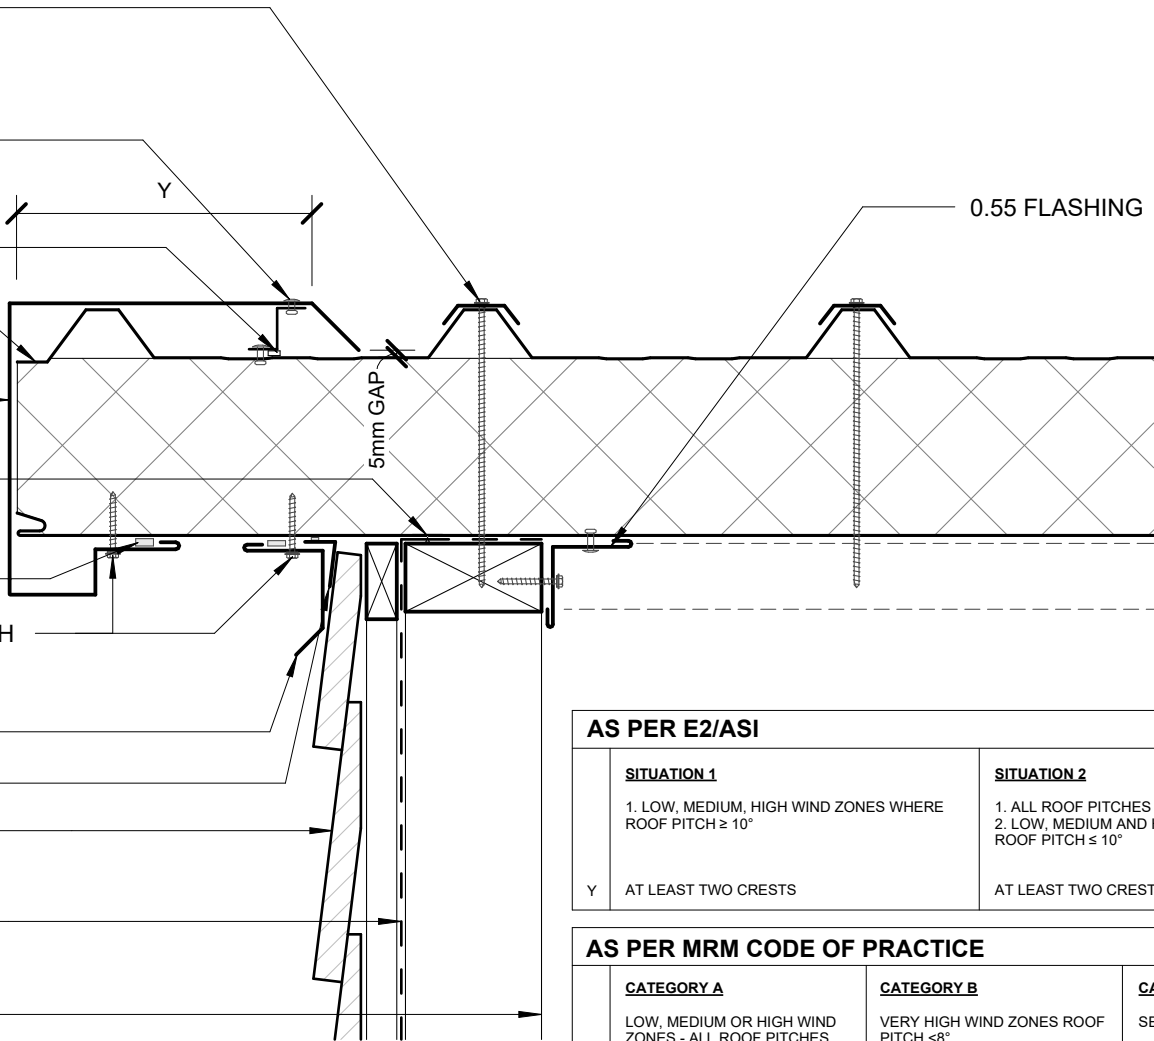

**AS PER E2/ASI**

	SITUATION 1	SITUATION 2	SITUATION 3
	1. LOW, MEDIUM, HIGH WIND ZONES WHERE ROOF PITCH $\geq 10^\circ$	1. ALL ROOF PITCHES IN VERY HIGH WIND ZONE 2. LOW, MEDIUM AND HIGH WIND ZONES WHERE ROOF PITCH $\leq 10^\circ$	1. ALL ROOF PITCHES IN EXTRA HIGH WIND ZONE.
Y	AT LEAST TWO CRESTS	AT LEAST TWO CRESTS	AT LEAST TWO CRESTS

**AS PER MRM CODE OF PRACTICE**

	CATEGORY A	CATEGORY B	CATEGORY C	CATEGORY D
	LOW, MEDIUM OR HIGH WIND ZONES - ALL ROOF PITCHES  VERY HIGH AND EXTRA HIGH WIND ZONES WHERE THE PITCH IS EQUAL TO OR GREATER THAN $10^\circ$	VERY HIGH WIND ZONES ROOF PITCH $< 8^\circ$  EXTRA HIGH WIND ZONES - ALL ROOF PITCHES	SED WIND ZONES UP TO 60 m/s  ALL ROOF PITCH	SED WIND ZONES UP TO 68 m/s  ALL ROOF PITCH
Y	TRAPEZOIDAL & TRAY: ONE RIB  CORRUGATE: 2 CORRUGATIONS	TRAPEZOIDAL & TRAY: TWO RIBS (20mm - 34mm)* ONE RIB ( $> 34\text{mm}$ )*  CORRUGATE: 2 CORRUGATIONS	TRAPEZOIDAL & TRAY: TWO RIBS (20mm - 34mm)* ONE RIB ( $> 34\text{mm}$ )*  CORRUGATE: 3 CORRUGATIONS	TRAPEZOIDAL & TRAY: TWO RIBS (20mm - 34mm)* + UNDERSOAKER ONE RIB ( $> 34\text{mm}$ )* + UNDERSOAKER  CORRUGATE: 2 CORRUGATIONS + UNDERSOAKER

\* RIB HEIGHT OF PROFILE OR TURNUP

**CANTILEVER BARGE CAPPING DETAIL 02**

AspireSpan PIR

Rev. 1.2

RESIDENTIAL ROOFING

Reference RRAPS

Date 19.12.2024

Scale 1 : 5

Sheet

14 / 32

PERMEABLE WALL UNDERLAY TO PROVIDE SEPARATION OF METAL CAPPING AND TIMBER, SHOWN DASHED

CONTINUOUS TIMBER PACKING

PRE-FINISHED 0.55 PARAPET CAP FLASHING

TIMBER PACKER

PRE-FINISHED SELF TAPPING WAFER-TEK SCREW WITH NEOPRENE WASHER

BARGE BOARD

STST OR GALV. FLAT HEAD NAIL FOR FLASHING

WEATHERBOARDS ON CAVITY

PERMEABLE WALL UNDERLAY, SHOWN DASHED

WALL FRAMING

ALUM. ANGLE ENGINEERED BY OTHERS

AS PER E2/ASI


	SITUATION 1	SITUATION 2	SITUATION 3
	1. LOW, MEDIUM, HIGH WIND ZONES, WHERE ROOF PITCH $\geq 10^\circ$	1. VERY HIGH WIND ZONE 2. LOW, MEDIUM AND HIGH WIND ZONES WHERE ROOF PITCHES $\leq 10^\circ$	1. ALL ROOF PITCHES IN EXTRA HIGH WIND ZONE
G	MIN. 35mm	MIN. 35mm	MIN. 35mm
N	MIN. 75mm	MIN. 75mm	MIN. 75mm
L	MIN. 130mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)	MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)	MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)
Z	MIN. 50mm	MIN. 70mm	MIN. 90mm

AS PER MRM CODE OF PRACTICE

	CATEGORY A	CATEGORY B	CATEGORY C	CATEGORY D
	LOW, MEDIUM OR HIGH WIND ZONES - ALL ROOF PITCHES  VERY HIGH AND EXTRA HIGH WIND ZONES WHERE THE PITCH IS EQUAL TO OR GREATER THAN $10^\circ$	VERY HIGH WIND ZONES ROOF PITCH $< 8^\circ$  EXTRA HIGH WIND ZONES - ALL ROOF PITCHES	SED WIND ZONES UP TO 60 m/s  ALL ROOF PITCH	SED WIND ZONES UP TO 68 m/s  ALL ROOF PITCH
G	25mm	25mm	25mm	25mm
N	MIN. 50mm + HEM OR 75mm (VERTICALLY UP FACE - SMOOTH) MIN. 75mm + HEM OR 100mm (VERTICALLY UP FACE - PROFILED)	MIN. 75mm + HEM OR 100mm (VERTICALLY UP FACE - SMOOTH) MIN. 100mm + HEM OR 125mm (VERTICALLY UP FACE - PROFILED)	MIN. 100mm + HEM OR 125mm (VERTICALLY UP FACE - SMOOTH) MIN. 125mm + HEM (VERTICALLY UP FACE - PROFILED)	MIN. 100mm + HEM OR 125mm (VERTICALLY UP FACE - SMOOTH) MIN. 125mm + HEM (VERTICALLY UP FACE - PROFILED)
L	MIN. 130mm	MIN. 200mm	MIN. 200mm + BAFFLE (REFER NZ MRM COP)	MIN. 200mm + BAFFLE (REFER NZ MRM COP)
Z	MIN. 50mm (VERTICALLY DOWN FACE - SMOOTH) MIN. 75mm (VERTICALLY DOWN FACE - PROFILED)	MIN. 75mm (VERTICALLY DOWN FACE - SMOOTH) MIN. 100mm (VERTICALLY DOWN FACE - PROFILED)	MIN. 100mm (VERTICALLY DOWN FACE - SMOOTH) MIN. 125mm (VERTICALLY DOWN FACE - PROFILED)	MIN. 100mm (VERTICALLY DOWN FACE - SMOOTH) MIN. 125mm (VERTICALLY DOWN FACE - PROFILED)

5mm POP RIVET OR PRE-FINISHED SELF-TAPPING TEK SCREW WITH NEOPRENE WASHER  
FOAM CLOSURE WHEN REQUIRED SEALED TOP AND BOTTOM  
PRE-FINISHED APRON FLASHING

STOPENDS TO ROOF CLADDING  
TIMBER NOG FOR FIXING APRON FLASHING  
FOAM FILL  
SELF TAPPING TEK SCREW WITH NEOPRENE WASHER

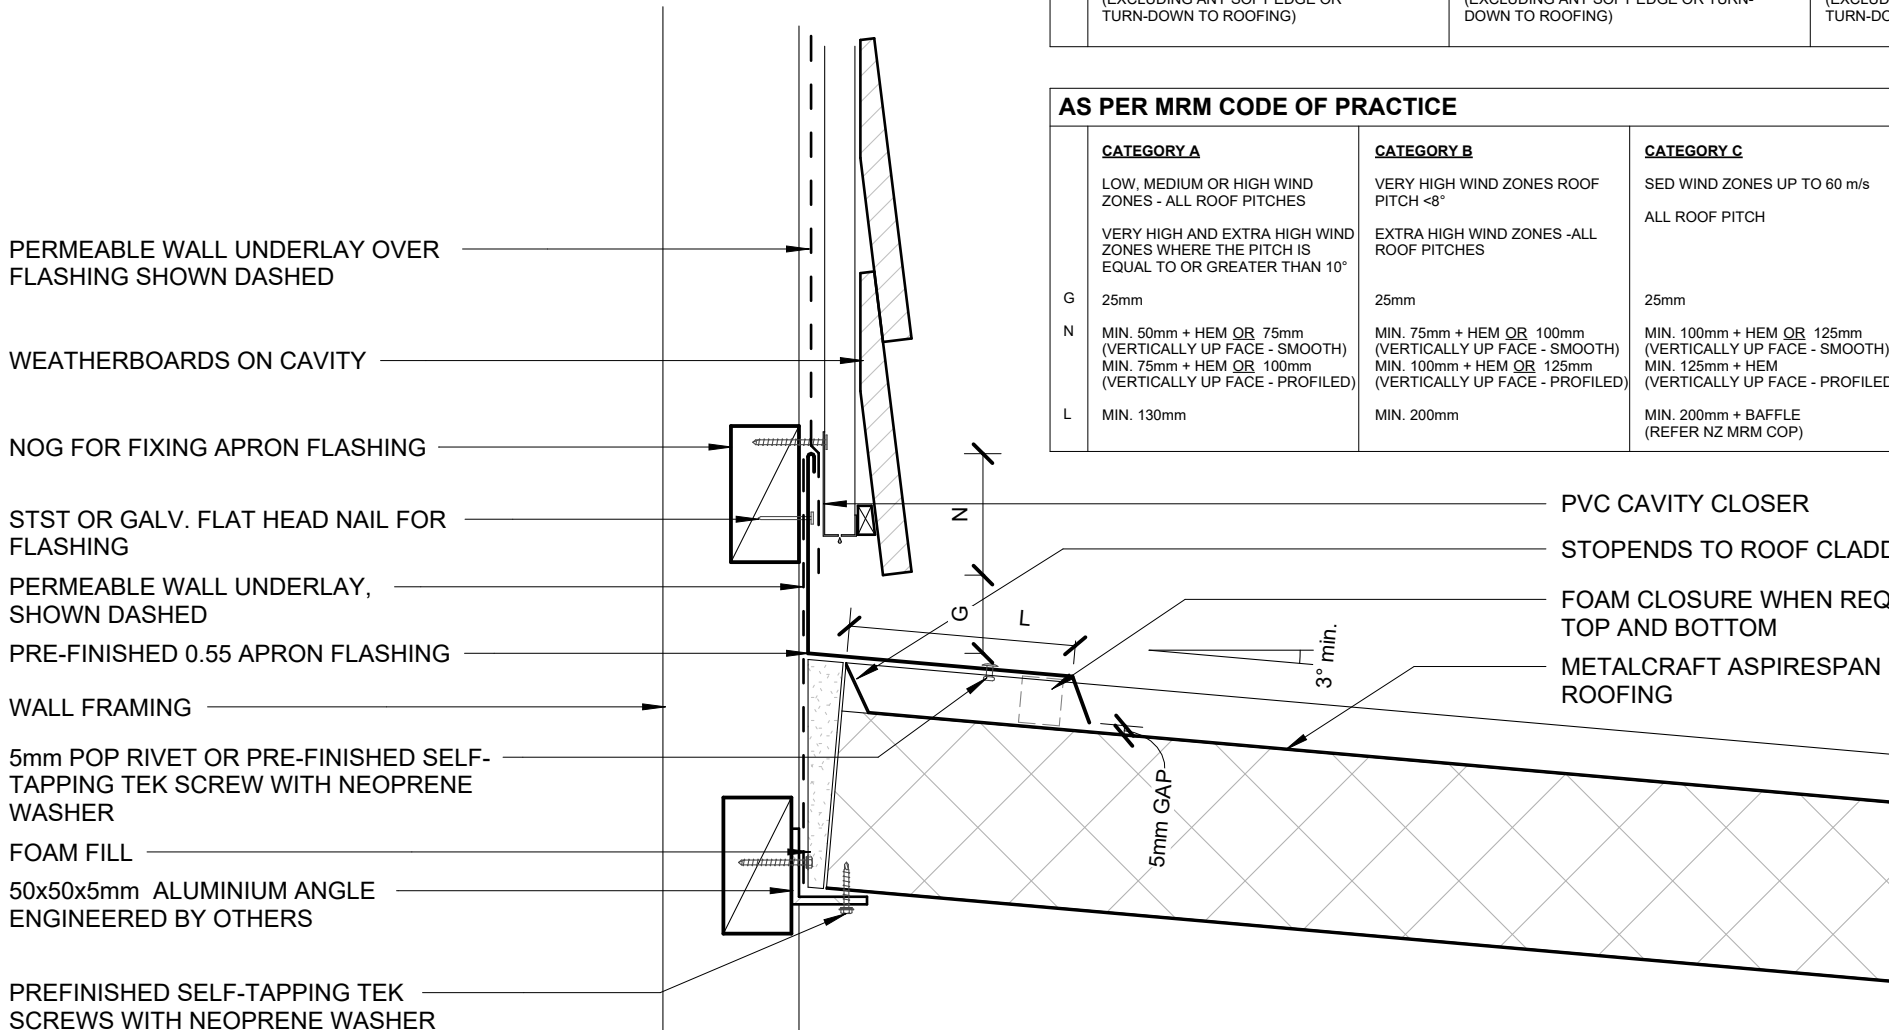

### AS PER E2/ASI

	SITUATION 1	SITUATION 2	SITUATION 3
	1. LOW, MEDIUM, HIGH WIND ZONES, WHERE ROOF PITCH $\geq 10^\circ$	1. ALL ROOF PITCHES IN VERY HIGH WIND ZONES 2. LOW, MEDIUM, AND HIGH WIND ZONES WHERE ROOF PITCH $\leq 10^\circ$	1. ALL ROOF PITCHES IN EXTRA HIGH WIND ZONE
G	MIN. 35mm	MIN. 35mm	MIN. 35mm
N	MIN. 75mm	MIN. 75mm	MIN. 75mm
L	MIN. 130mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)	MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)	MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)

### AS PER MRM CODE OF PRACTICE


	CATEGORY A	CATEGORY B	CATEGORY C	CATEGORY D
	LOW, MEDIUM OR HIGH WIND ZONES - ALL ROOF PITCHES  VERY HIGH AND EXTRA HIGH WIND ZONES WHERE THE PITCH IS EQUAL TO OR GREATER THAN $10^\circ$	VERY HIGH WIND ZONES ROOF PITCH $< 8^\circ$  EXTRA HIGH WIND ZONES - ALL ROOF PITCHES	SED WIND ZONES UP TO 60 m/s  ALL ROOF PITCH	SED WIND ZONES UP TO 68 m/s  ALL ROOF PITCH
G	25mm	25mm	25mm	25mm
N	MIN. 50mm + HEM OR 75mm (VERTICALLY UP FACE - SMOOTH) MIN. 75mm + HEM OR 100mm (VERTICALLY UP FACE - PROFILED)	MIN. 75mm + HEM OR 100mm (VERTICALLY UP FACE - SMOOTH) MIN. 100mm + HEM OR 125mm (VERTICALLY UP FACE - PROFILED)	MIN. 100mm + HEM OR 125mm (VERTICALLY UP FACE - SMOOTH) MIN. 125mm + HEM (VERTICALLY UP FACE - PROFILED)	MIN. 100mm + HEM OR 125mm (VERTICALLY UP FACE - SMOOTH) MIN. 125mm + HEM (VERTICALLY UP FACE - PROFILED)
L	MIN. 130mm	MIN. 200mm	MIN. 200mm + BAFFLE (REFER NZ MRM COP)	MIN. 200mm + BAFFLE (REFER NZ MRM COP)

## AS PER E2/ASI

	SITUATION 1	SITUATION 2	SITUATION 3
	1. LOW, MEDIUM, HIGH WIND ZONES, WHERE ROOF PITCH $\geq 10^\circ$	1. ALL ROOF PITCHES IN VERY HIGH WIND ZONE 2. LOW, MEDIUM, AND HIGH WIND ZONES WHERE ROOF PITCH $\leq 10^\circ$	1. ALL ROOF PITCHES IN EXTRA HIGH WIND ZONE
G	MIN. 35mm	MIN. 35mm	MIN. 35mm
N	MIN. 75mm	MIN. 75mm	MIN. 75mm
M	AT LEAST TWO CRESTS	AT LEAST TWO CRESTS	AT LEAST TWO CRESTS


## AS PER MRM CODE OF PRACTICE

	CATEGORY A	CATEGORY B	CATEGORY C	CATEGORY D
	LOW, MEDIUM OR HIGH WIND ZONES - ALL ROOF PITCHES  VERY HIGH AND EXTRA HIGH WIND ZONES WHERE THE PITCH IS EQUAL TO OR GREATER THAN $10^\circ$	VERY HIGH WIND ZONES ROOF PITCH $< 8^\circ$  EXTRA HIGH WIND ZONES - ALL ROOF PITCHES	SED WIND ZONES UP TO 60 m/s  ALL ROOF PITCH	SED WIND ZONES UP TO 68 m/s  ALL ROOF PITCH
G	25mm	25mm	25mm	25mm
N	MIN. 50mm + HEM OR 75mm (VERTICALLY UP FACE - SMOOTH) MIN. 75mm + HEM OR 100mm (VERTICALLY UP FACE - PROFILED)	MIN. 75mm + HEM OR 100mm (VERTICALLY UP FACE - SMOOTH) MIN. 100mm + HEM OR 125mm (VERTICALLY UP FACE - PROFILED)	MIN. 100mm + HEM OR 125mm (VERTICALLY UP FACE - SMOOTH) MIN. 125mm + HEM (VERTICALLY UP FACE - PROFILED)	MIN. 100mm + HEM OR 125mm (VERTICALLY UP FACE - SMOOTH) MIN. 125mm + HEM (VERTICALLY UP FACE - PROFILED)
M	TRAPEZOIDAL & TRAY: ONE RIB  CORRUGATE: 2 CORRUGATIONS	TRAPEZOIDAL & TRAY: TWO RIBS (20mm - 34mm)* ONE RIB ( $> 34$ mm)*  CORRUGATE: 2 CORRUGATIONS	TRAPEZOIDAL & TRAY: TWO RIBS (20mm - 34mm)* ONE RIB ( $> 34$ mm)*  CORRUGATE: 3 CORRUGATIONS	TRAPEZOIDAL & TRAY: TWO RIBS (20mm - 34mm)* + UNDERSOAKER ONE RIB ( $> 34$ mm)* + UNDERSOAKER  CORRUGATE: 2 CORRUGATIONS + UNDERSOAKER
* RIB HEIGHT OF PROFILE OR TURNUP				

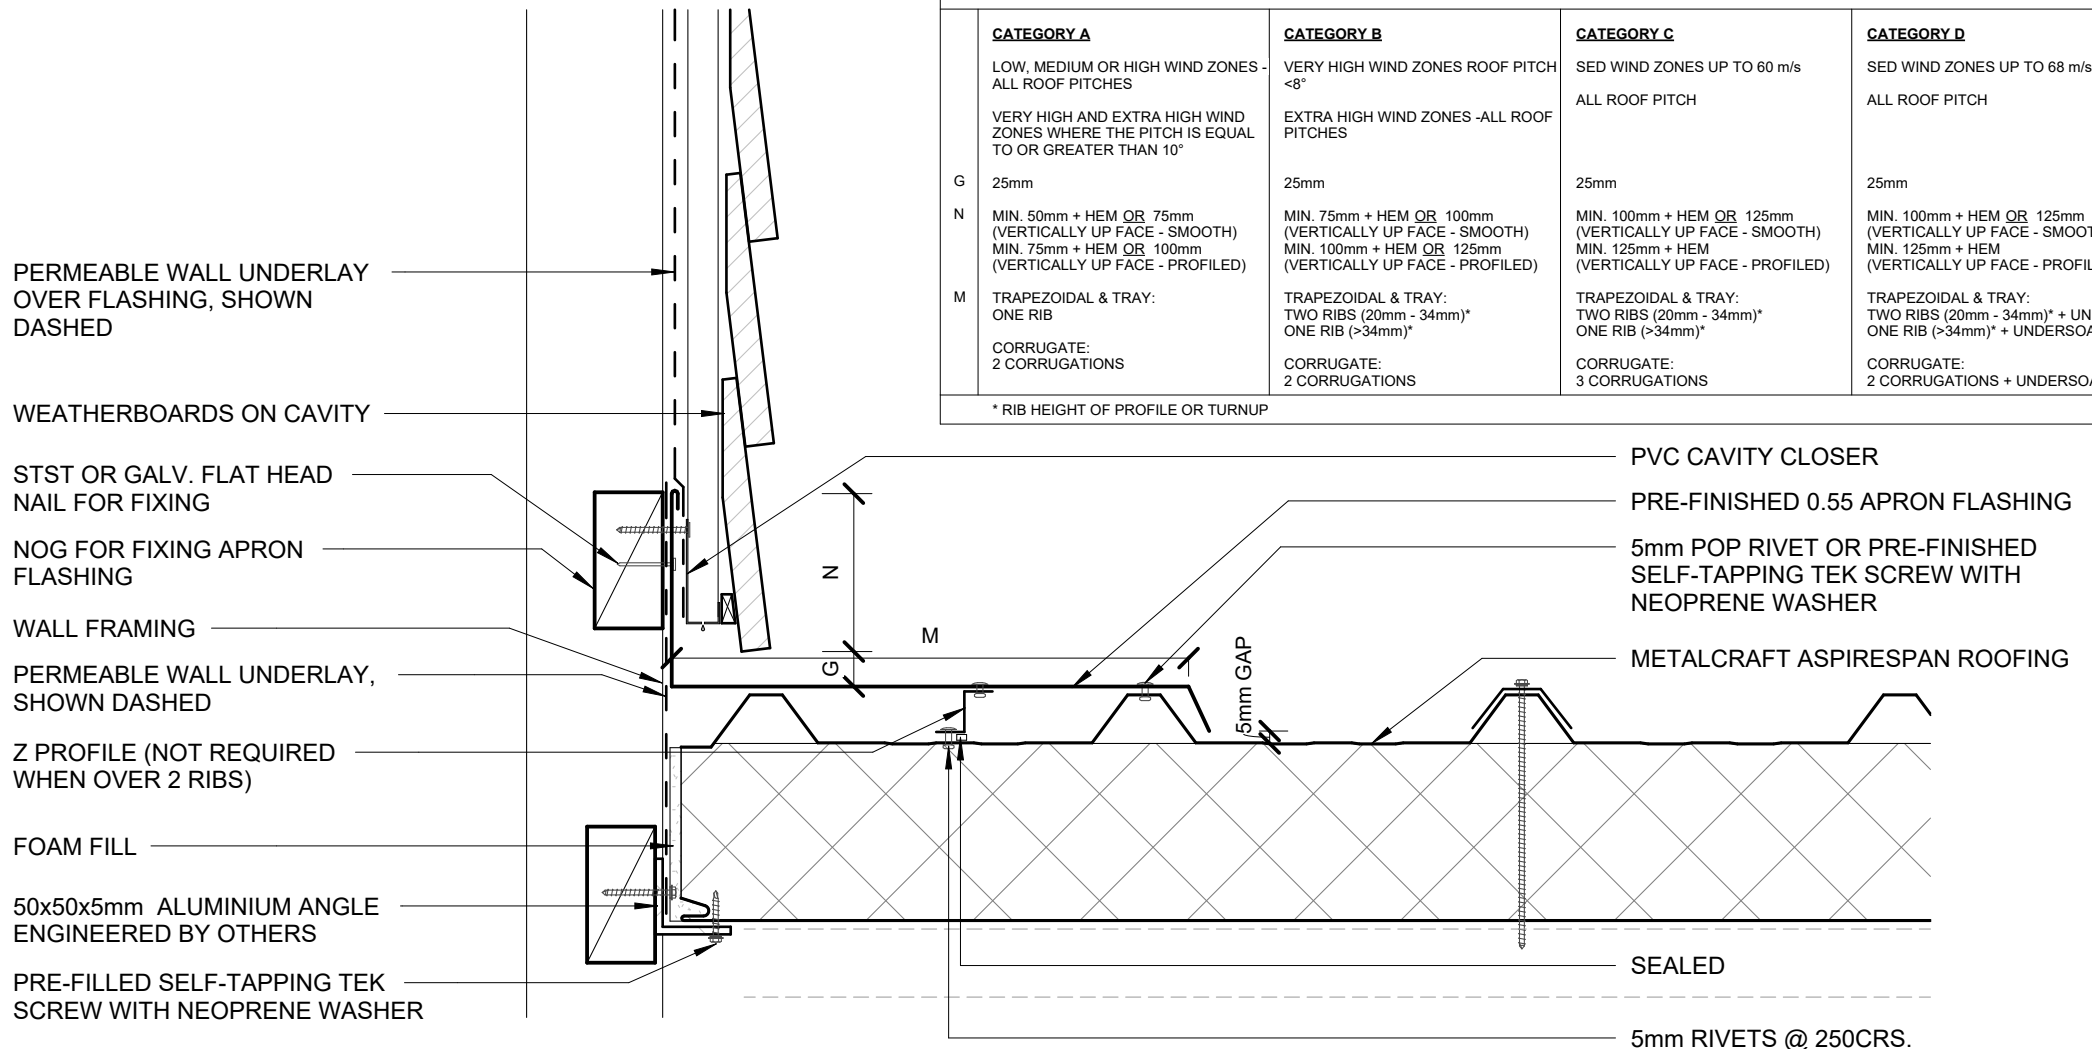


\* MIN. 10° FOR PIPE PENETRATION. DIRECT FIX  
BOOT FLASHING IS APPLICABLE FOR WHEN  
LESS THAN 50% BLOCKAGE OCCURS. WHEN  
EXCEEDING 50% BLOCKAGE OCCURS, REFER TO BACK  
TRAY BOOT FLASHING

REFER TO MRM CODE OF PRACTICE

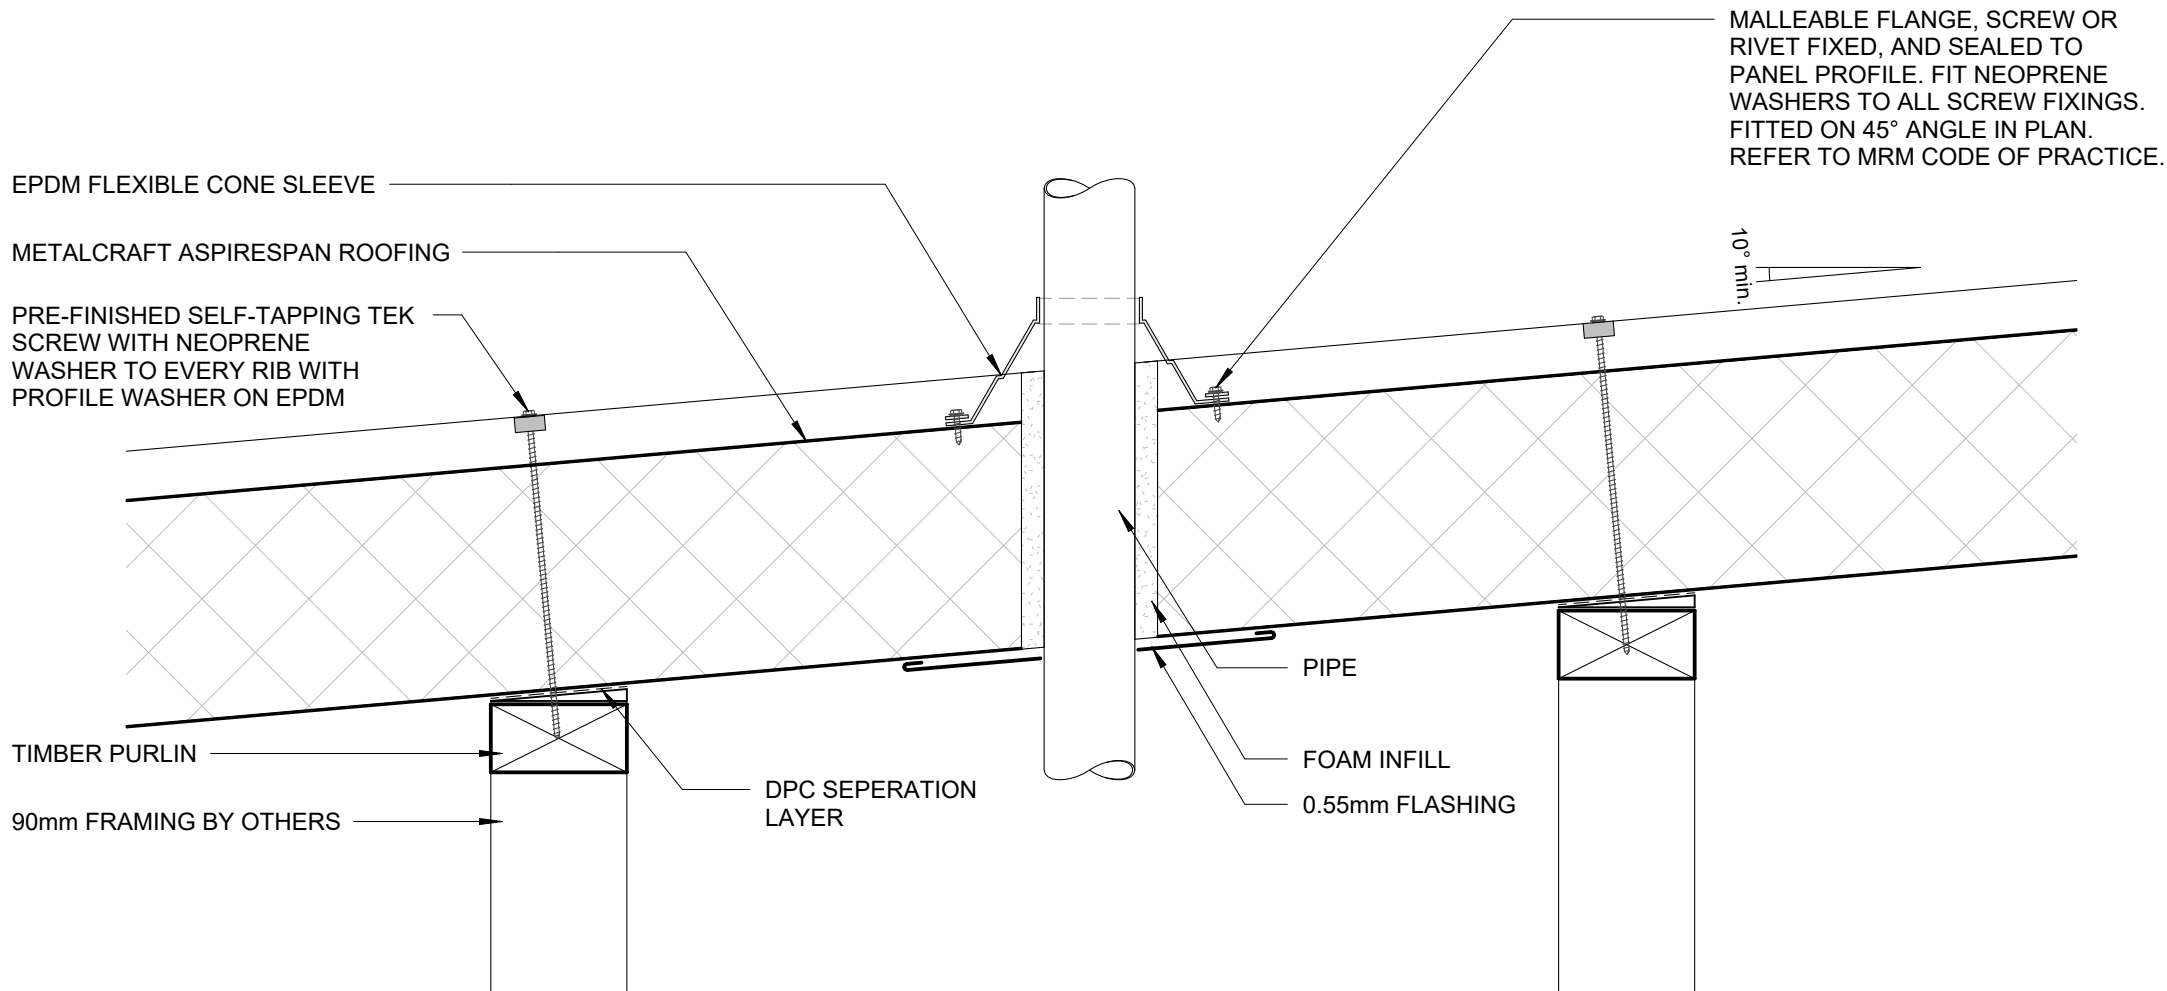

\* MIN. 3° FOR PIPE PENETRATION WITH A BOOT FLASHING.  
REFER MRM CODE OF PRACTICE

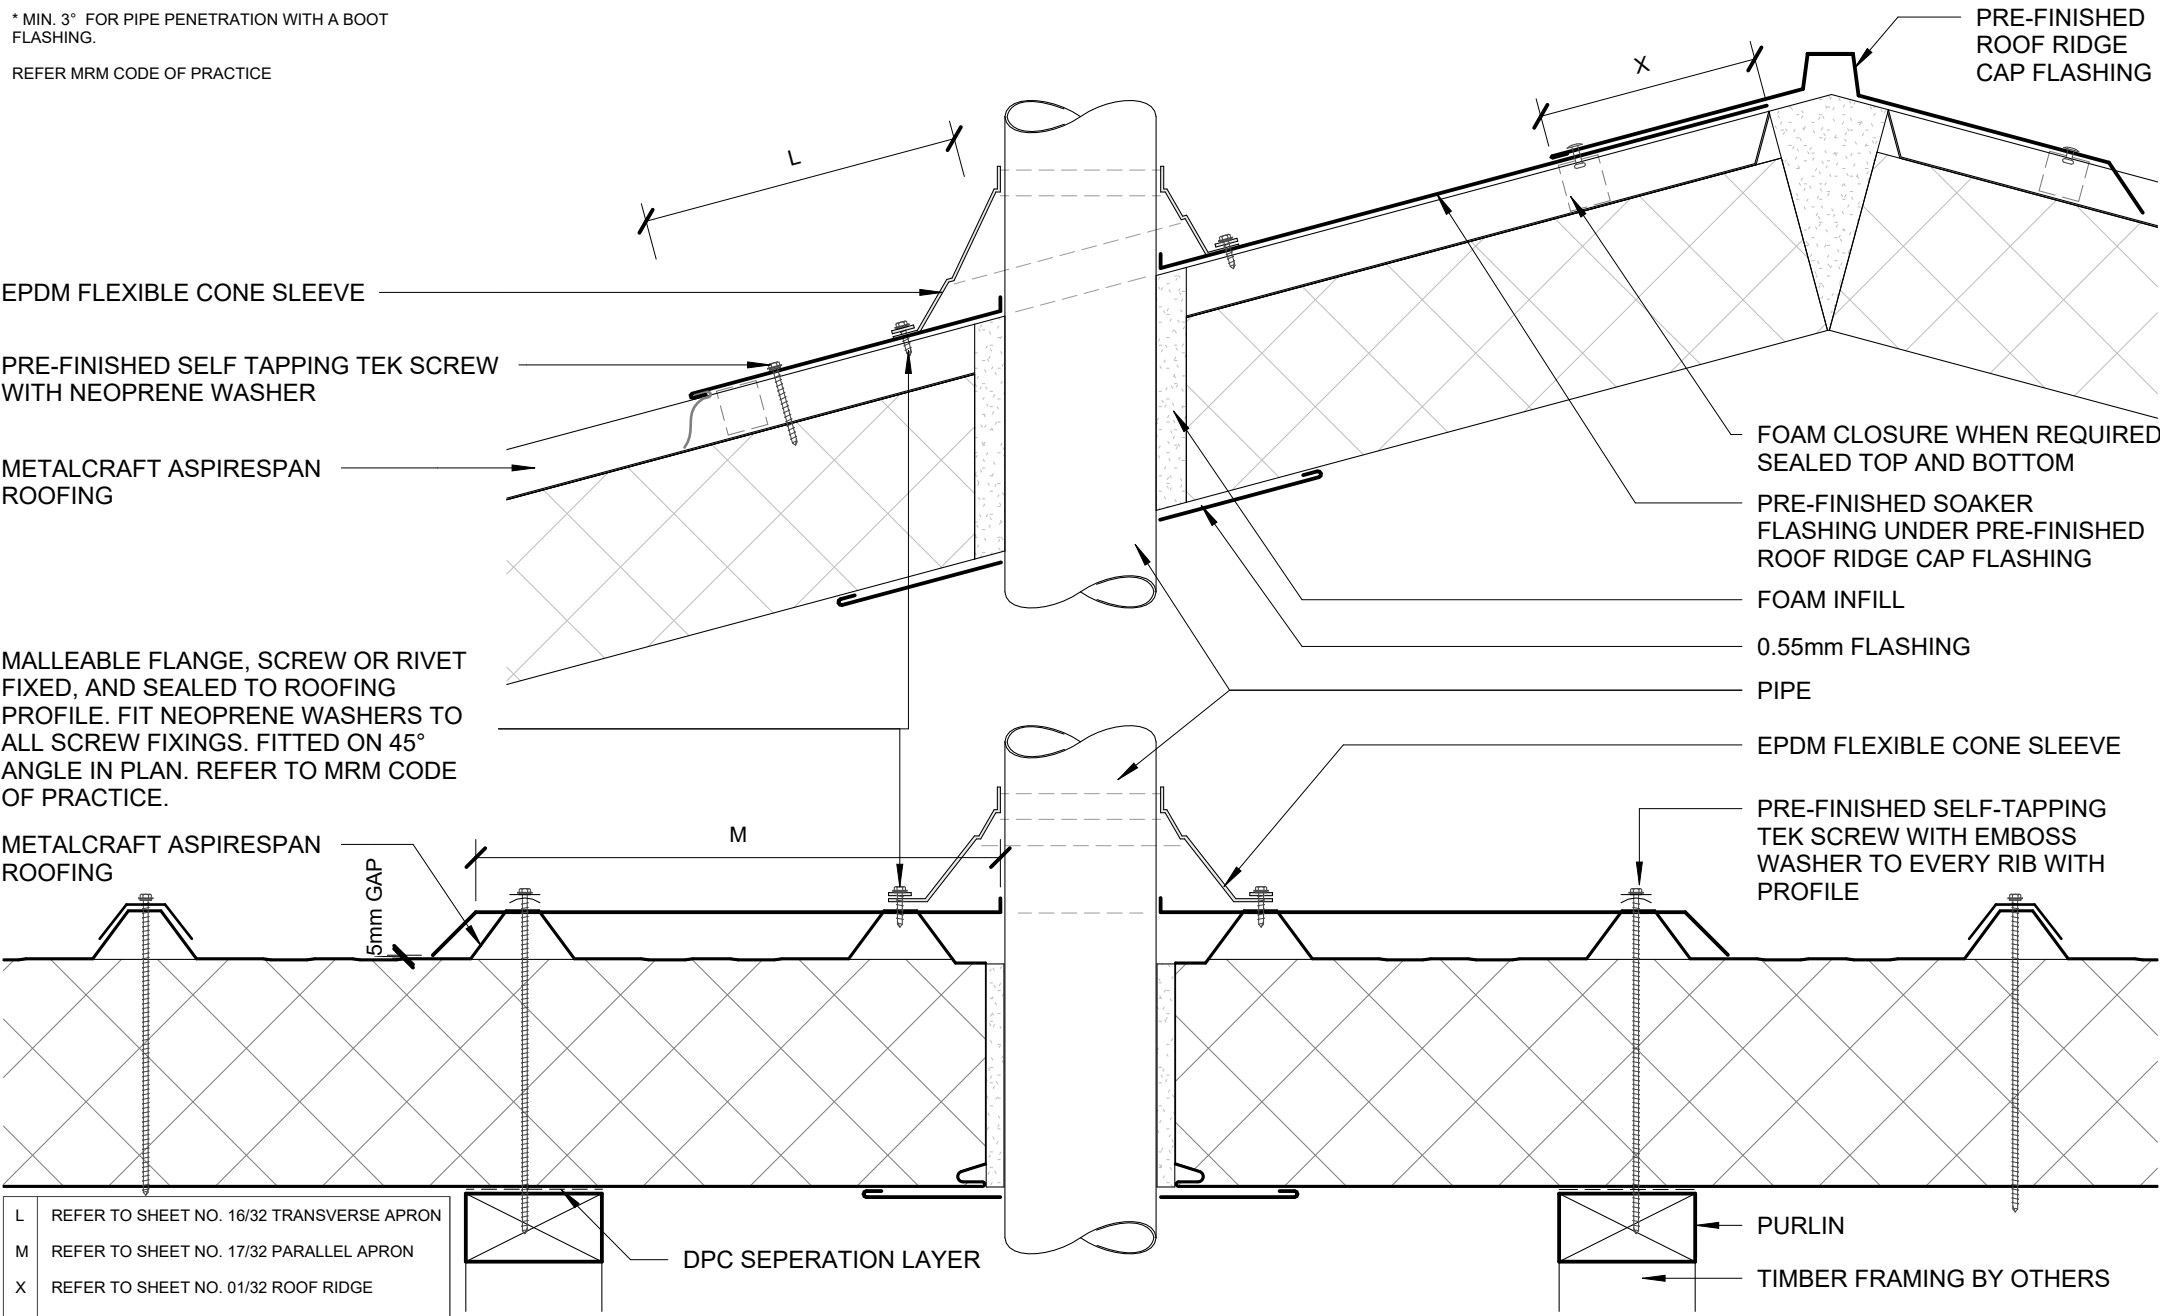


L	REFER TO SHEET NO. 16/32 TRANSVERSE APRON
M	REFER TO SHEET NO. 17/32 PARALLEL APRON
X	REFER TO SHEET NO. 01/32 ROOF RIDGE

# PIPE PENETRATION BACK TRAY BOOT FLASHING

AspireSpan PIR Rev. 1.2 RESIDENTIAL ROOFING

Reference RRAPS Date 19.12.2024 Scale 1 : 5 Sheet 19 / 32

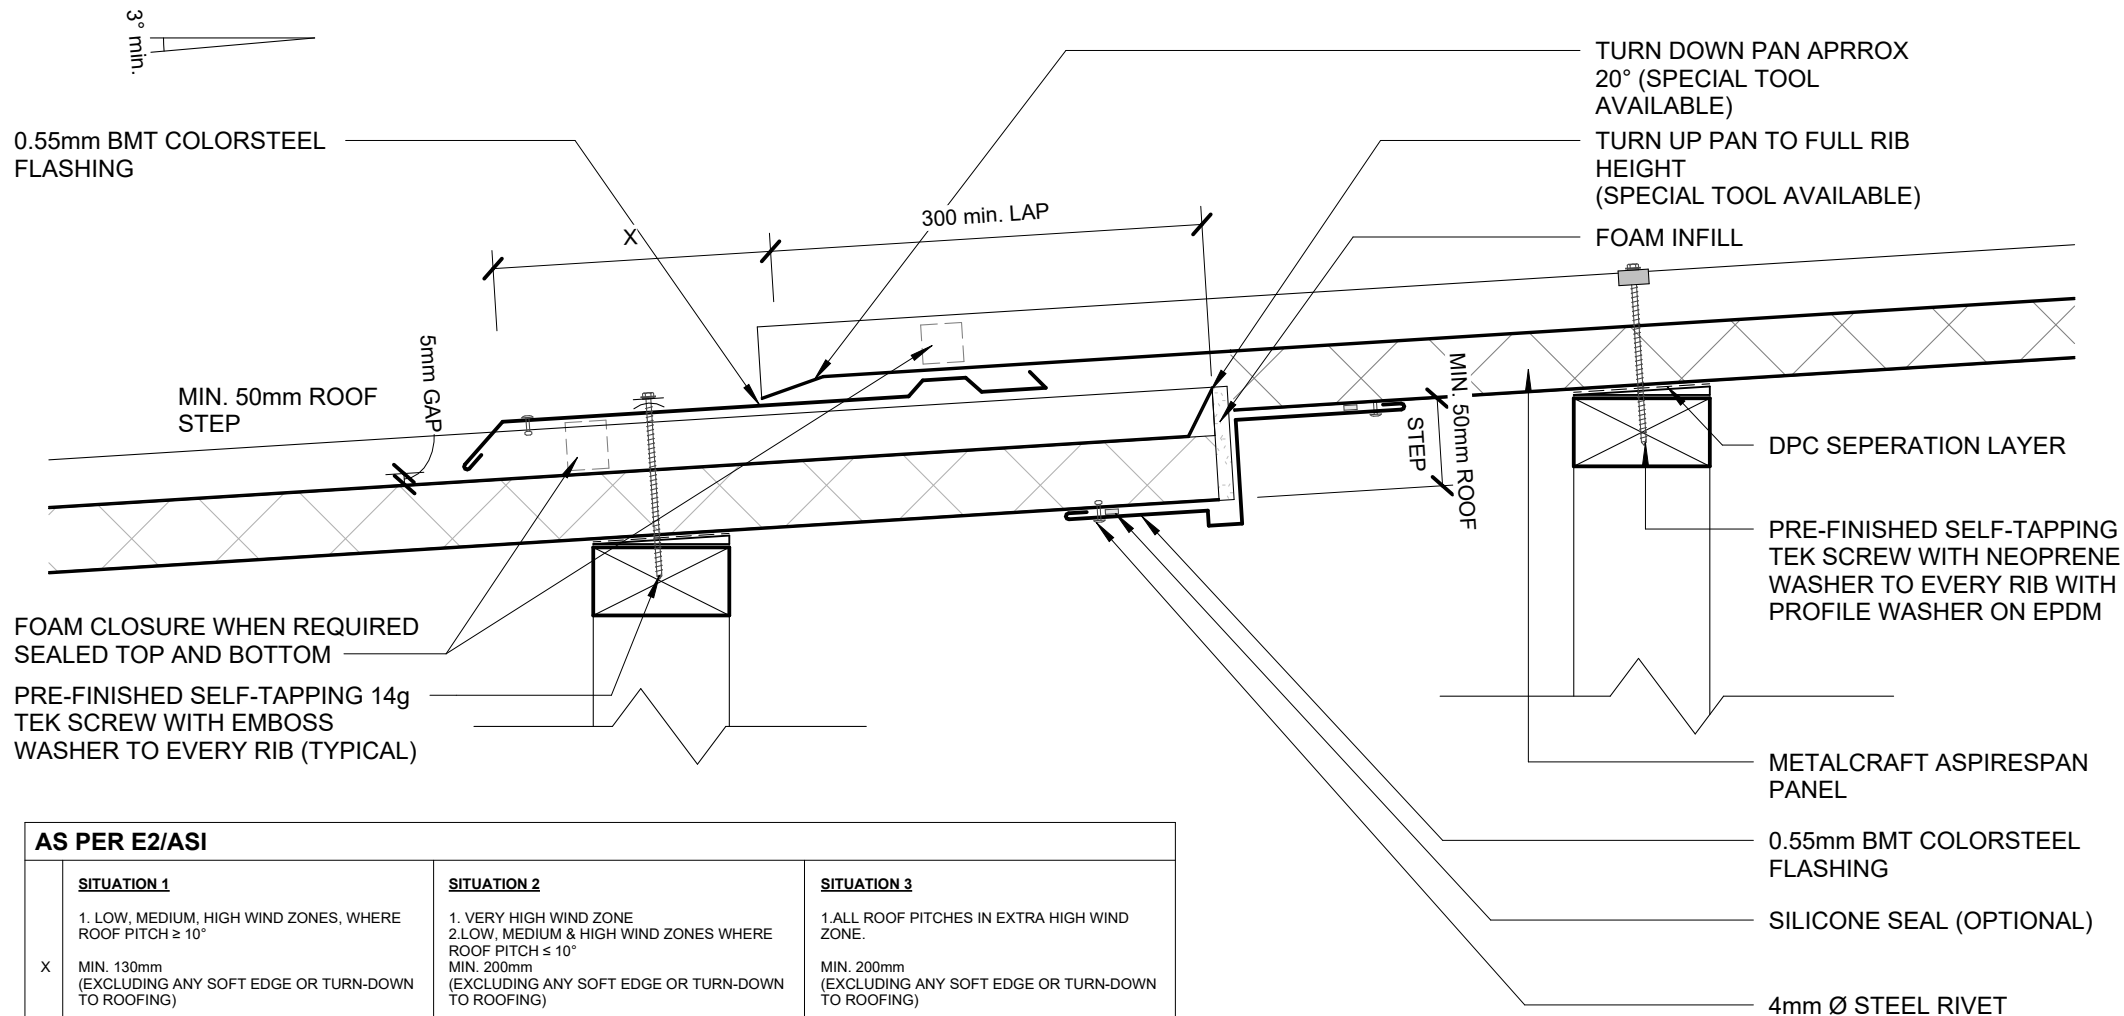


#### AS PER E2/ASI


	<u>SITUATION 1</u>	<u>SITUATION 2</u>	<u>SITUATION 3</u>
X	<p>1. LOW, MEDIUM, HIGH WIND ZONES, WHERE ROOF PITCH <math>\geq 10^\circ</math></p> <p>MIN. 130mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)</p>	<p>1. VERY HIGH WIND ZONE</p> <p>2. LOW, MEDIUM &amp; HIGH WIND ZONES WHERE ROOF PITCH <math>\leq 10^\circ</math></p> <p>MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)</p>	<p>1. ALL ROOF PITCHES IN EXTRA HIGH WIND ZONE.</p> <p>MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)</p>

#### AS PER MRM CODE OF PRACTICE


	<u>CATEGORY A</u>	<u>CATEGORY B</u>	<u>CATEGORY C</u>	<u>CATEGORY D</u>
X	<p>LOW, MEDIUM OR HIGH WIND ZONES - ALL ROOF PITCHES</p> <p>VERY HIGH AND EXTRA HIGH WIND ZONES WHERE THE PITCH IS EQUAL TO OR GREATER THAN <math>10^\circ</math></p> <p>MIN. 130mm</p>	<p>VERY HIGH WIND ZONES ROOF PITCH <math>&lt; 8^\circ</math></p> <p>EXTRA HIGH WIND ZONES - ALL ROOF PITCHES</p> <p>MIN. 200mm</p>	<p>SED WIND ZONES UP TO 60 m/s</p> <p>ALL ROOF PITCH</p> <p>MIN. 200mm</p>	<p>SED WIND ZONES UP TO 68 m/s</p> <p>ALL ROOF PITCH</p> <p>MIN. 200mm + BAFFLE (REFER NZ MRM COP)</p>

DETAIL  
RECOMMENDED  
WHERE ROOF RUNS  
EXCEED 16m

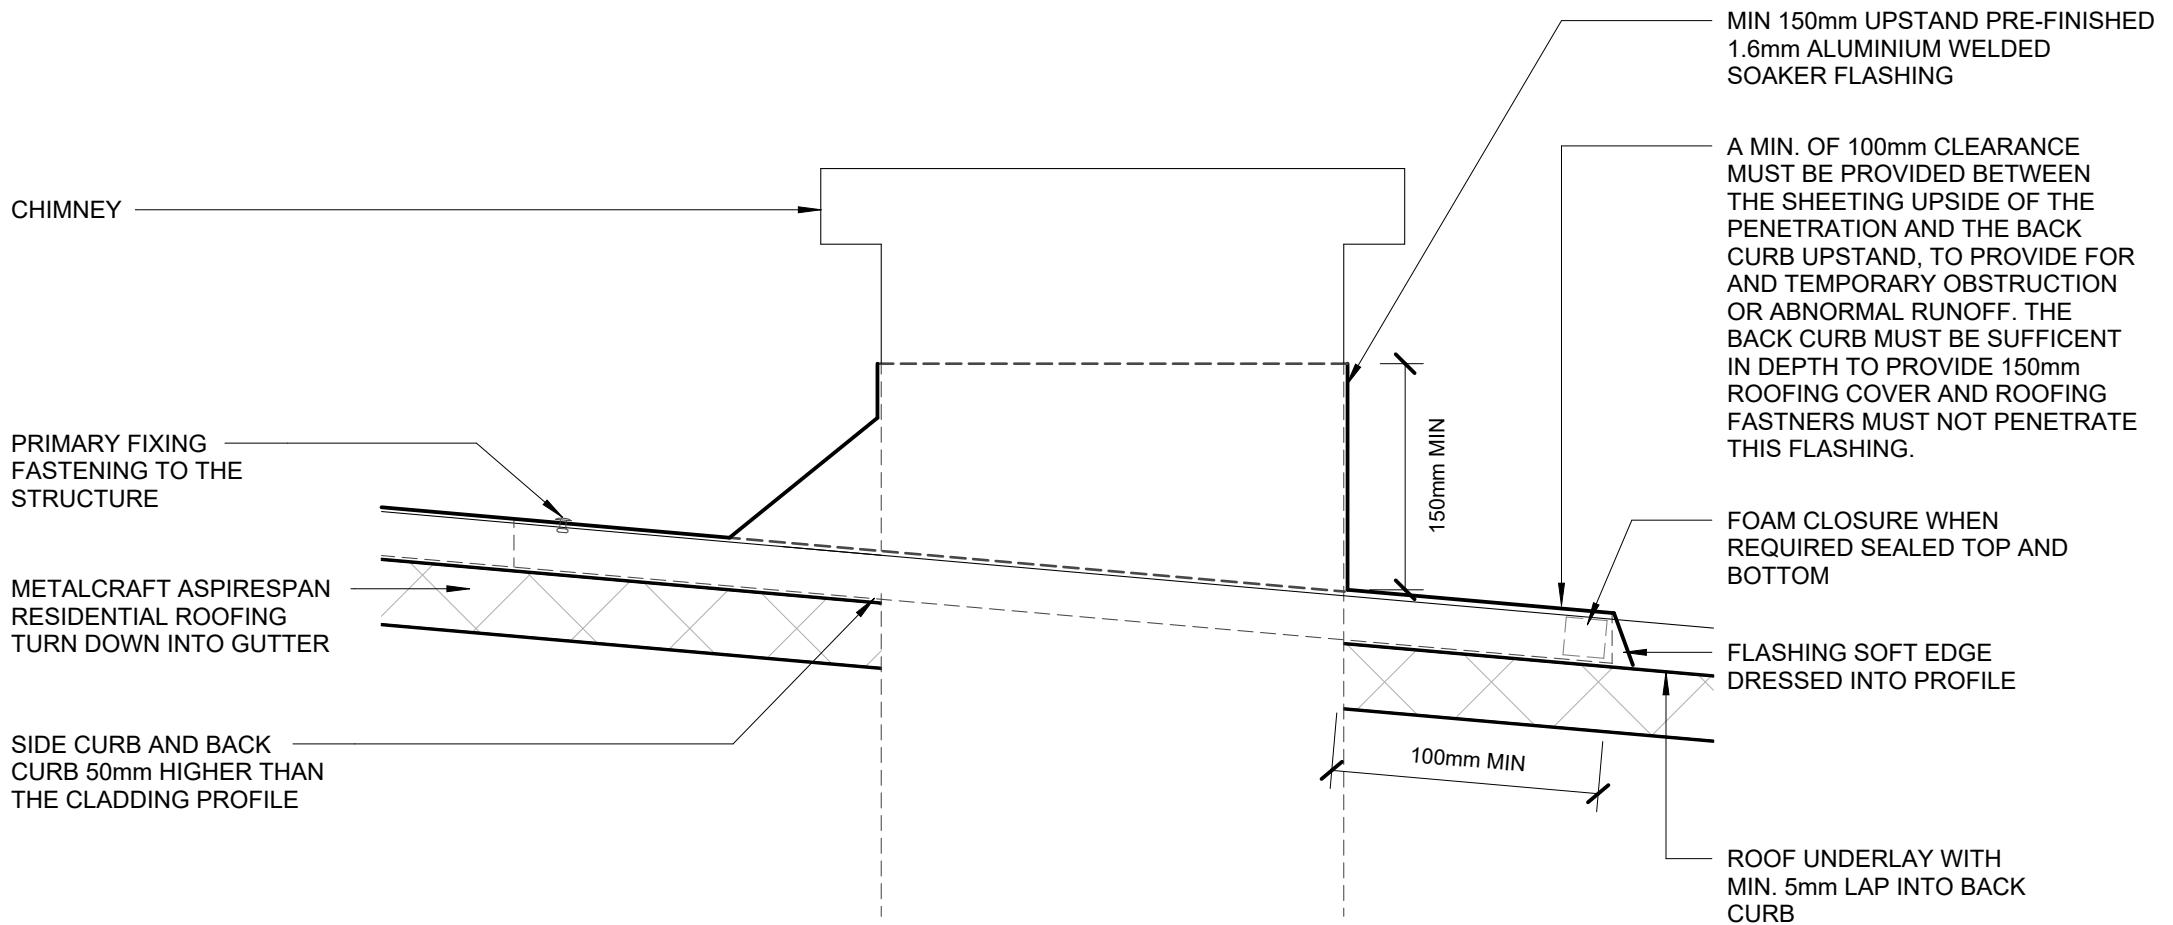


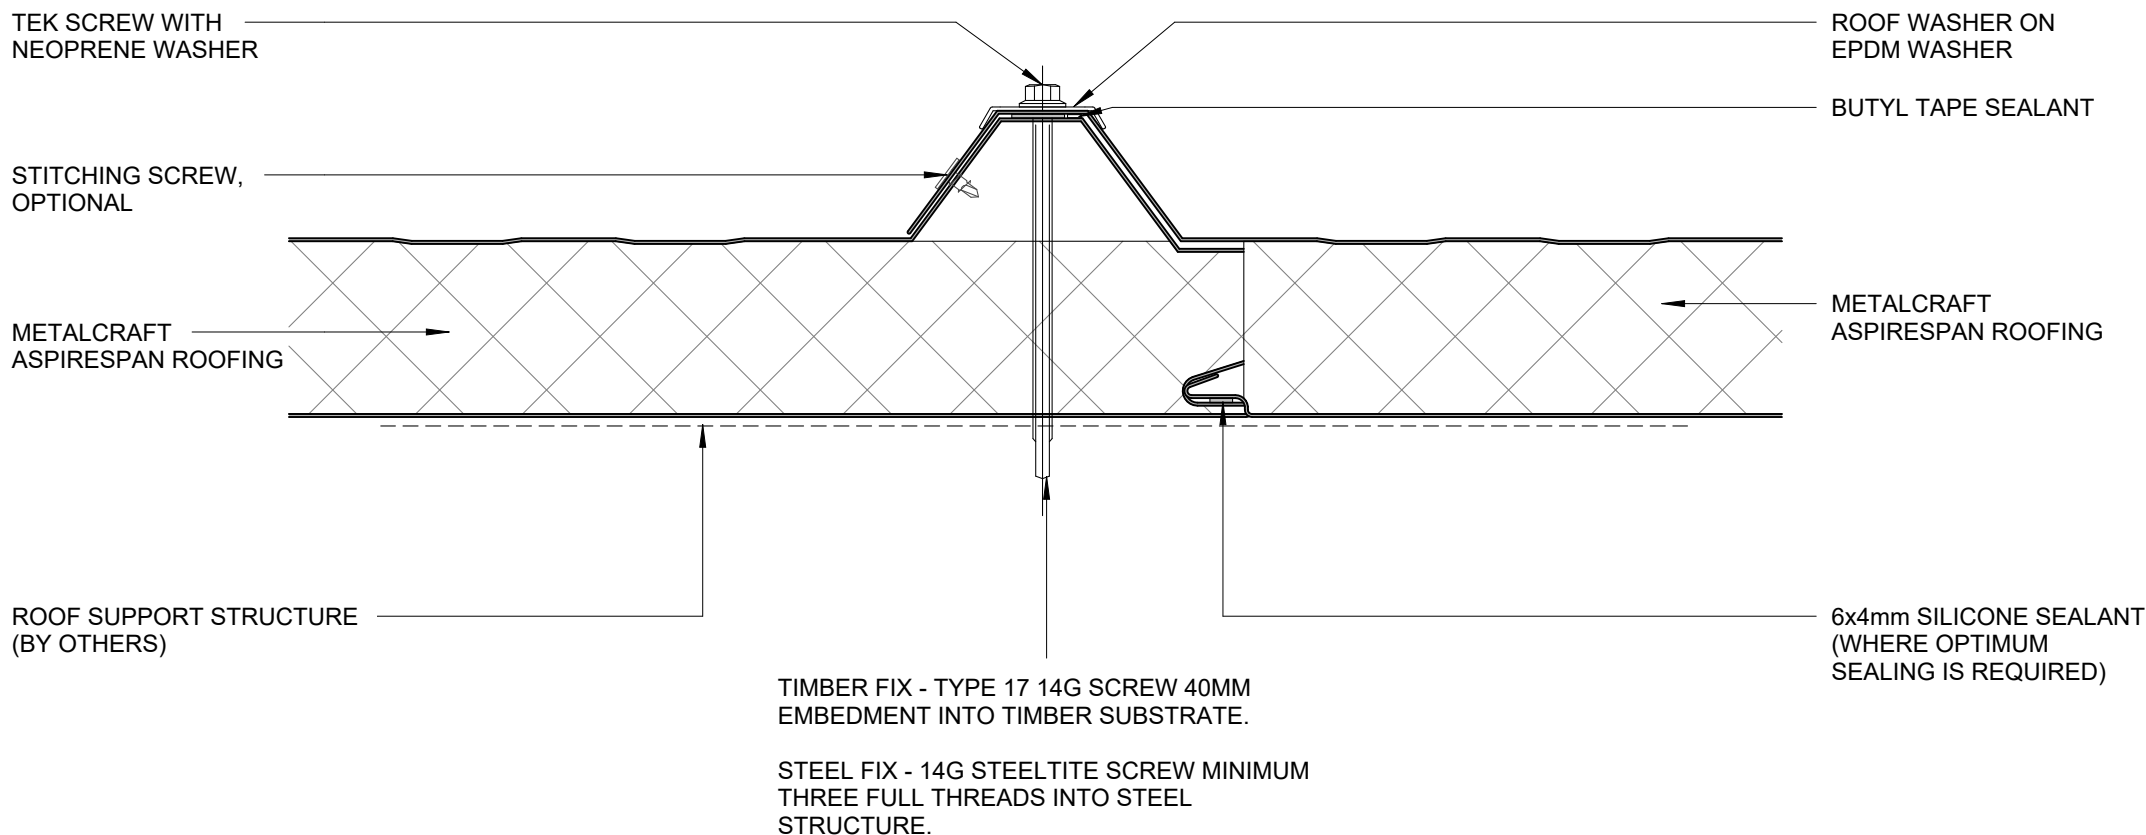



ASPIRESPAN HEAD BARGE FLASHING

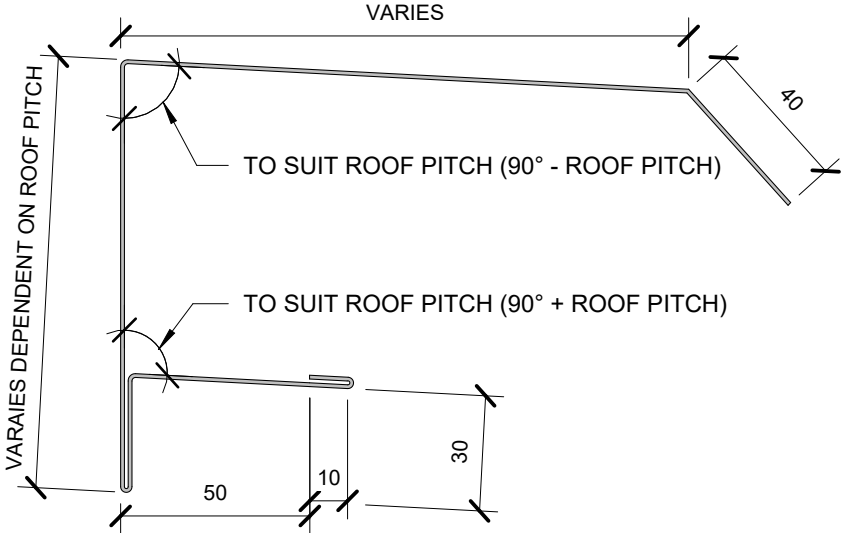

FOAM CLOSURE WHEN REQUIRED SEALED  
TOP AND BOTTOM

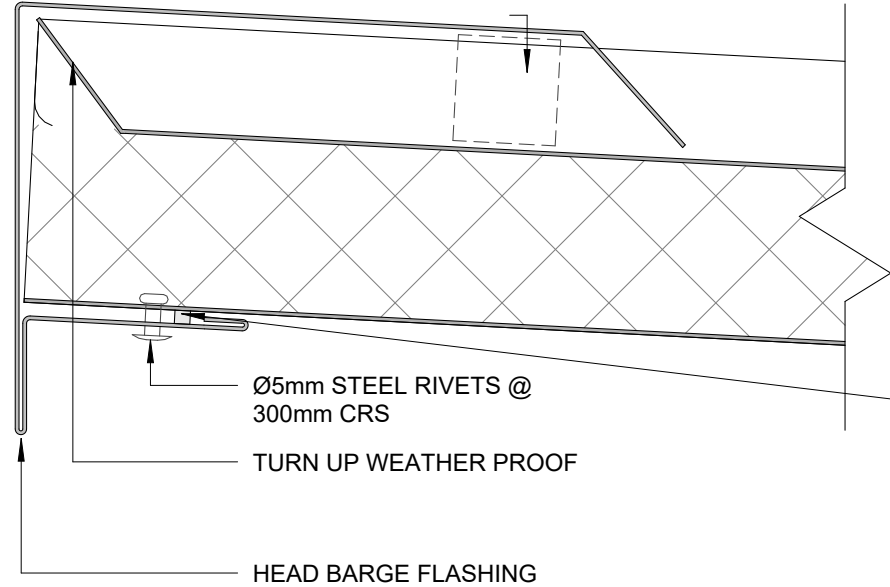

ASPIRESPAN FASCIA FLASHING

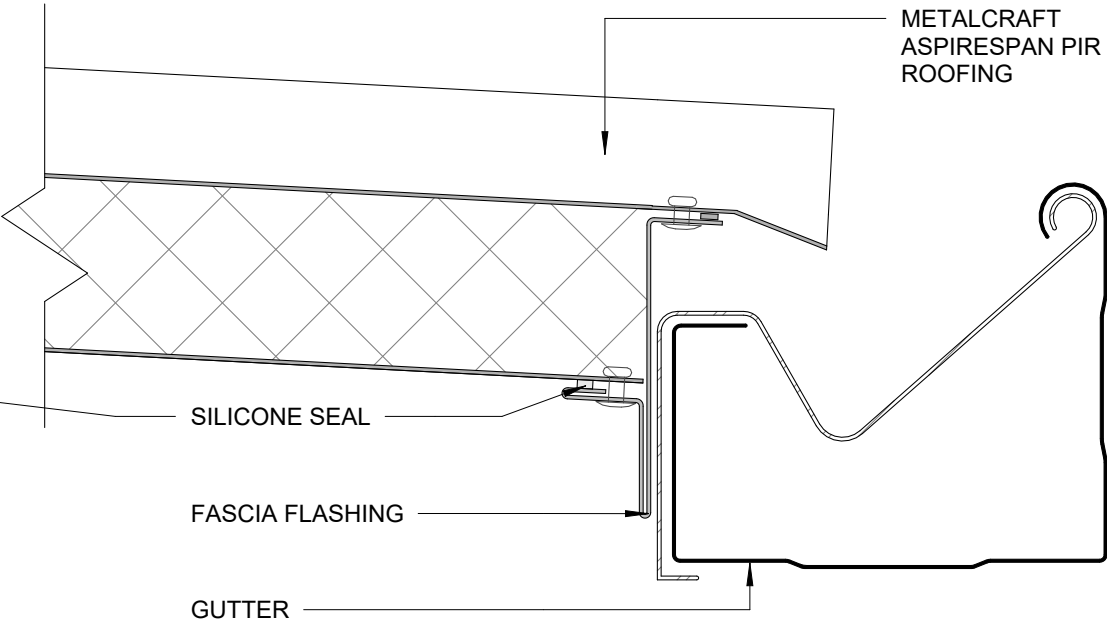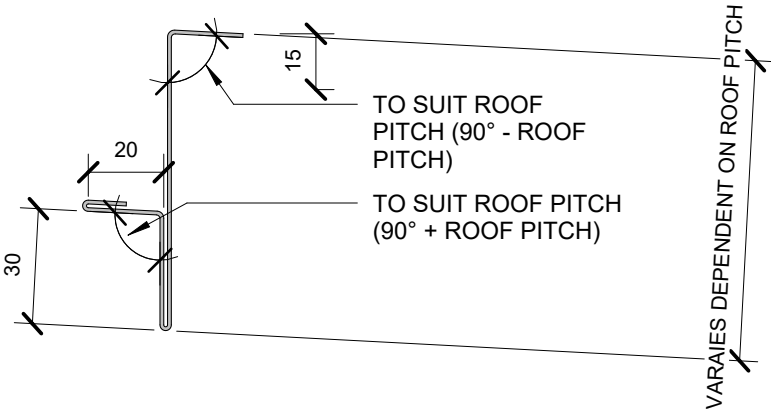

FASCIA AND BARGE FLASHING DIMENSIONS

AspireSpan PIR

Rev. 1.1

RESIDENTIAL ROOFING


Reference RRAPS

Date 19.12.2024

Scale 1 : 2

Sheet

23 / 32

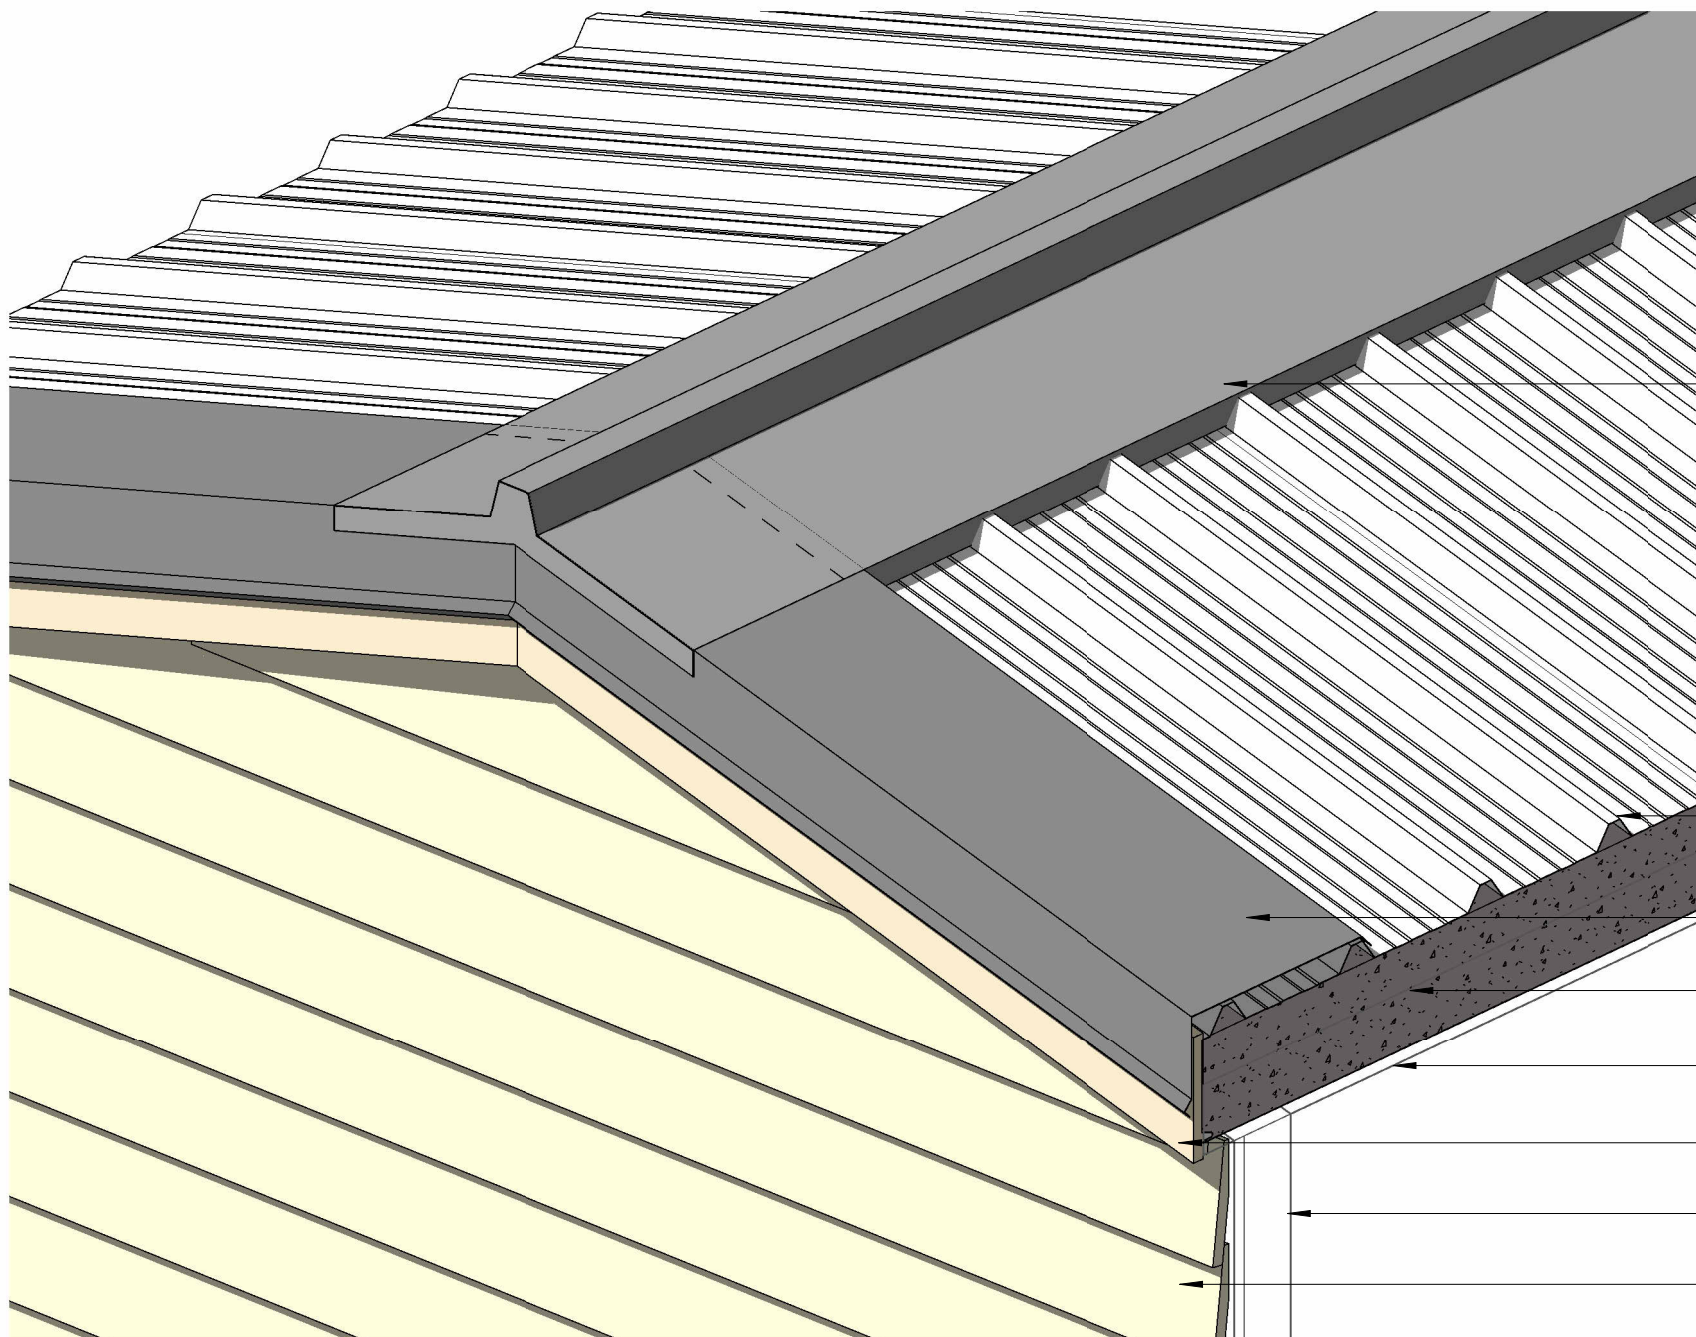

\* PLEASE REFER TO MRM  
CODE OF PRACTICE AND RANZ  
HOW TO ON-SITE GUIDE  
METAL ROOF FLASHINGS FOR  
FURTHER INFORMATION ON  
FLASHING COVER WIDTHS.

PRE-FINISHED RIDGE CAP  
FLASHING

METALCRAFT ASPIRESPAN

PRE-FINISHED BARGE  
FLASHING

PURLIN

ROOF FRAMING

FASCIA BOARD

WALL FRAMING

WALL CLADDING ON  
CAVITY

### 3D RIDGE TO BARGE JUCTION RESIDENTIAL ROOFING

PRE-FINISHED RIDGE FLASHING

PRE-FINISHED BARGE FLASHING

PRE-FINISHED HIP FLASHING

PRE-FINISHED APRON FLASHING

METALCRAFT ASPIRESPAN PANELS  
TURN DOWN INTO GUTTER  
REFER TO EAVE DETAILS FOR  
MINIMUM ROOF OVERHANG


GUTTER


FASCIA BOARD

WALL CLADDING ON CAVITY

\* PLEASE REFER TO MRM CODE OF  
PRACTICE AND RANZ HOW TO ON-SITE  
GUIDE METAL ROOF FLASHINGS FOR  
FURTHER INFORMATION ON FLASHING  
COVER WIDTHS.

DISCLAIMER:  
All details are to be used for indicative purposes only and the designer should consult both the MRM  
code of practice and E2 and all other relevant building codes. Details of the supporting mechanisms are  
indicative only. These installation details must be read in conjunction with all other product literature  
available for download from [www.metalcraftinsulatedpanels.co.nz](http://www.metalcraftinsulatedpanels.co.nz)

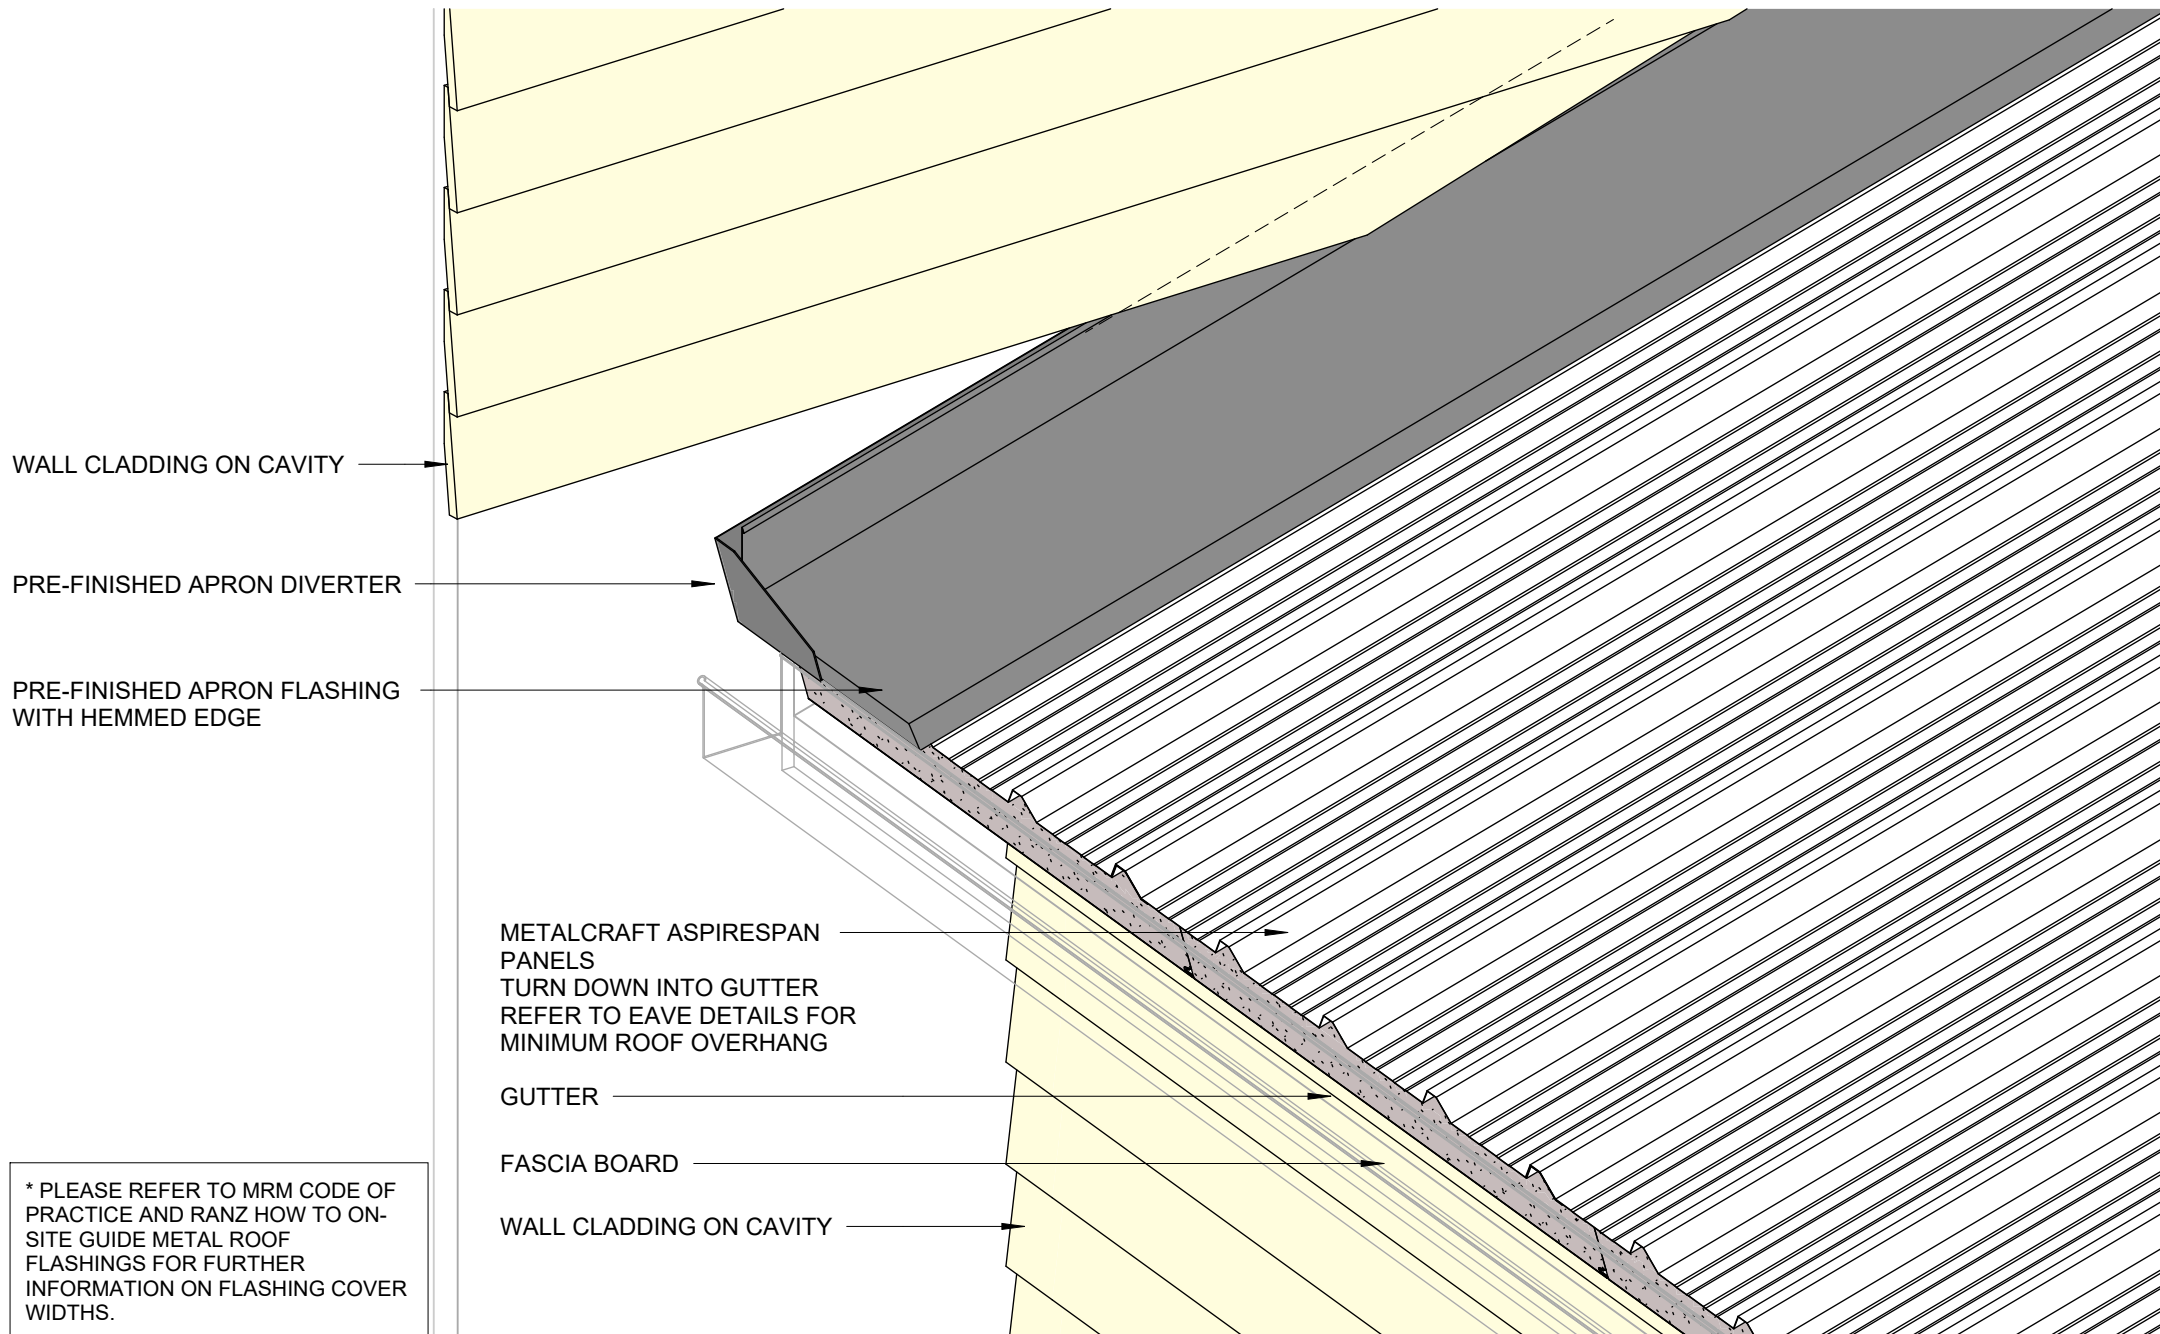

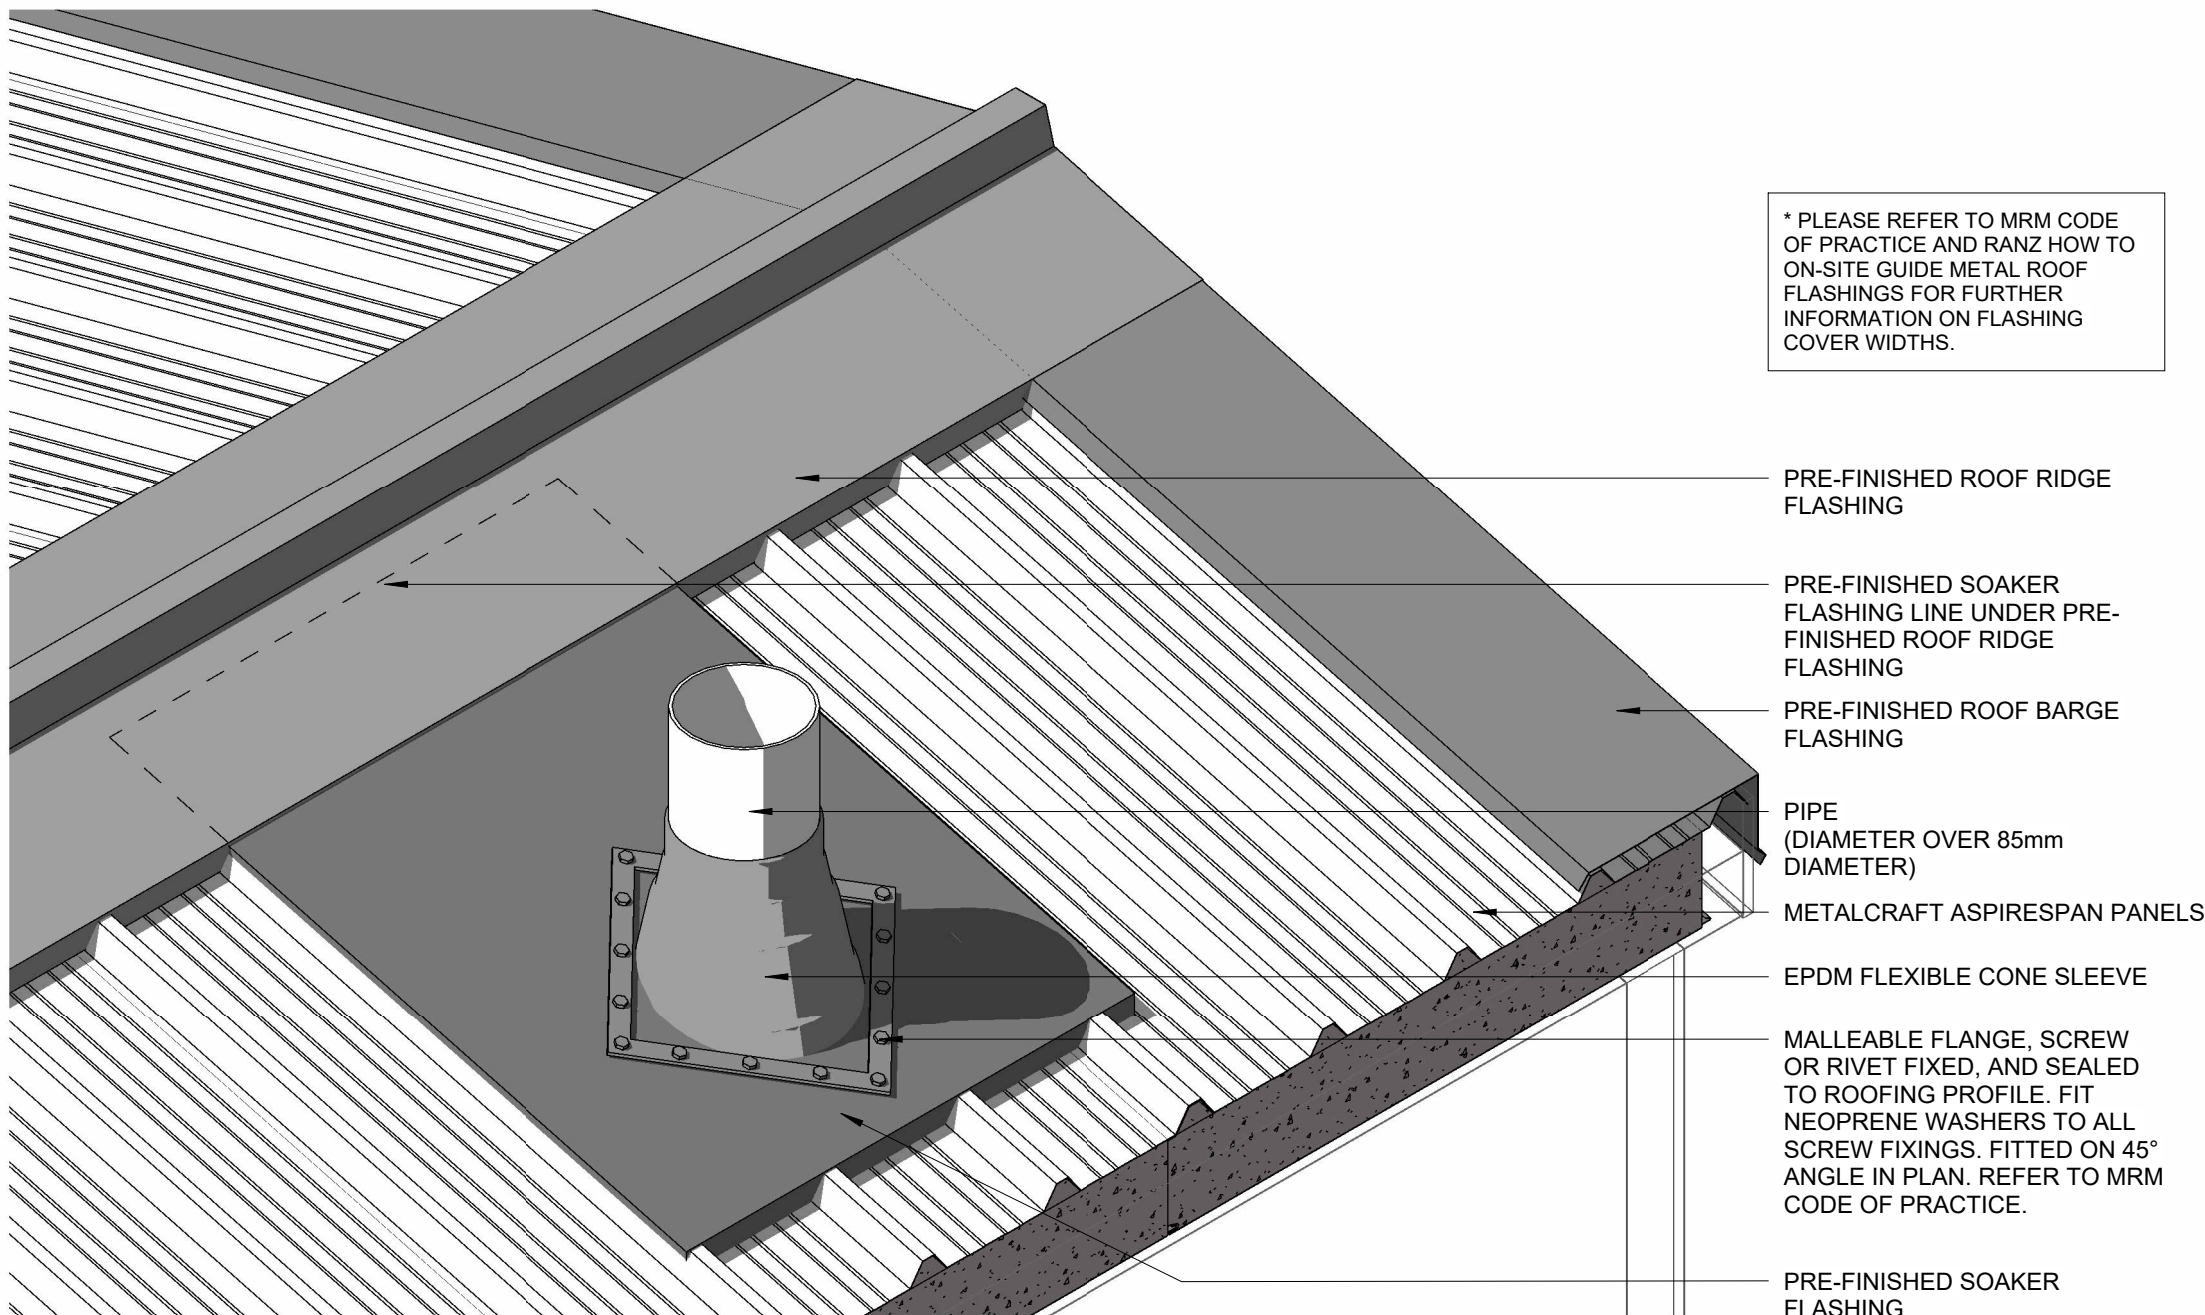

### 3D OVER 85mm DIAMETER PIPE PENETRATION

AspireSpan PIR

Rev. 1.2

RESIDENTIAL ROOFING

Reference RRAPS

Date 19.12.2024

Scale


Sheet

27 / 32


**Metalcraft**  
Insulated Panels

[www.metalcraftinsulatedpanels.co.nz](http://www.metalcraftinsulatedpanels.co.nz)


DISCLAIMER:  
All details are to be used for indicative purposes only and the designer should consult both the MRM code of practice and E2 and all other relevant building codes. Details of the supporting mechanisms are indicative only. These installation details must be read in conjunction with all other product literature available for download from [www.metalcraftinsulatedpanels.co.nz](http://www.metalcraftinsulatedpanels.co.nz)

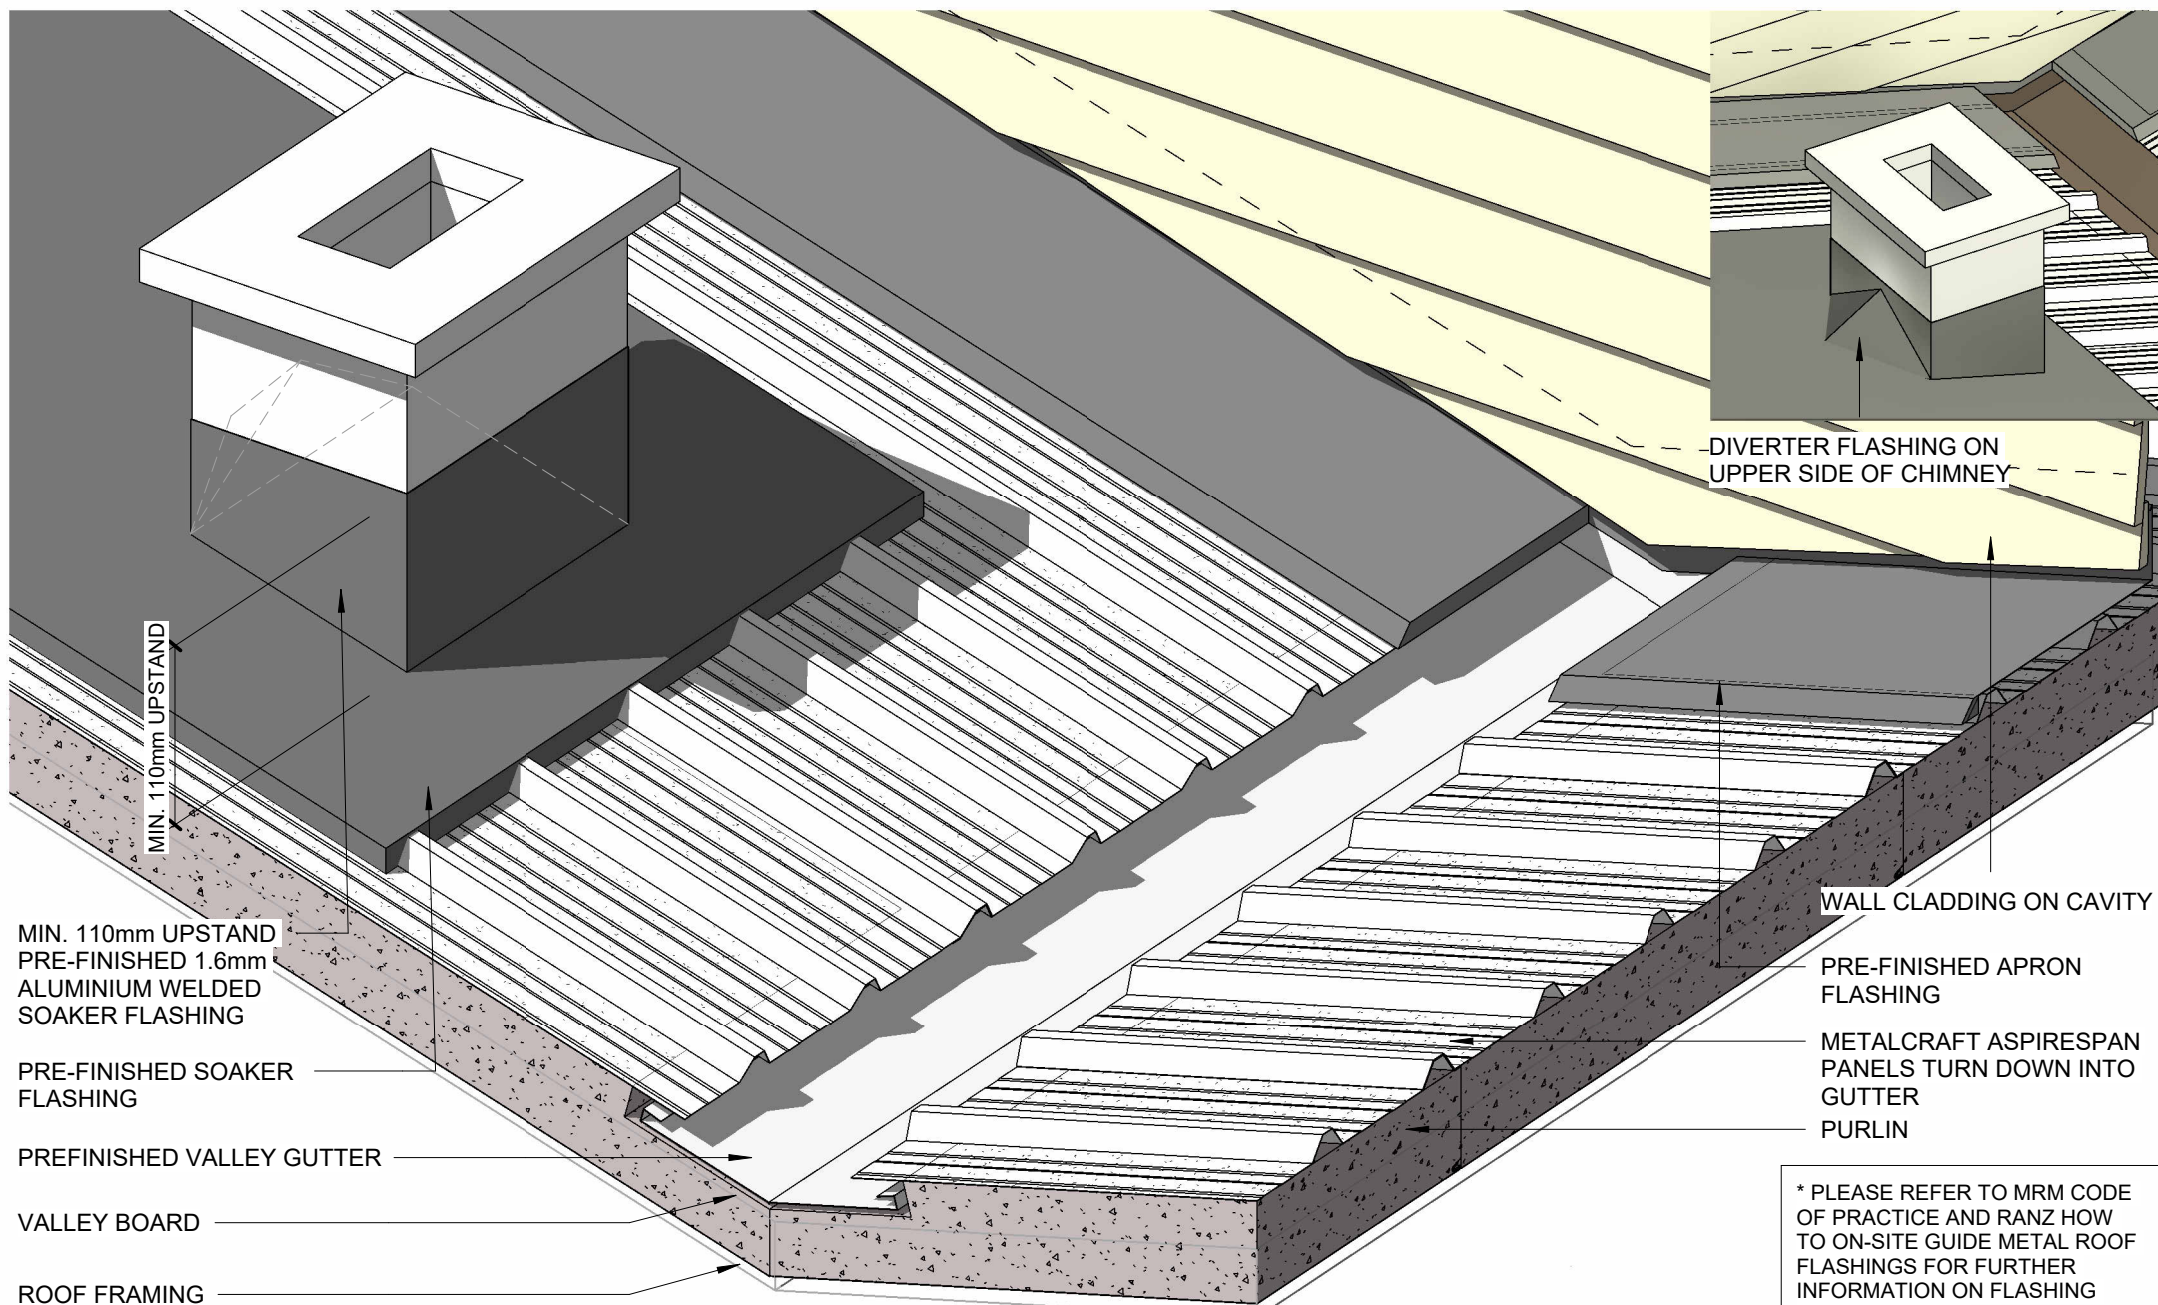


**OPTION 1**

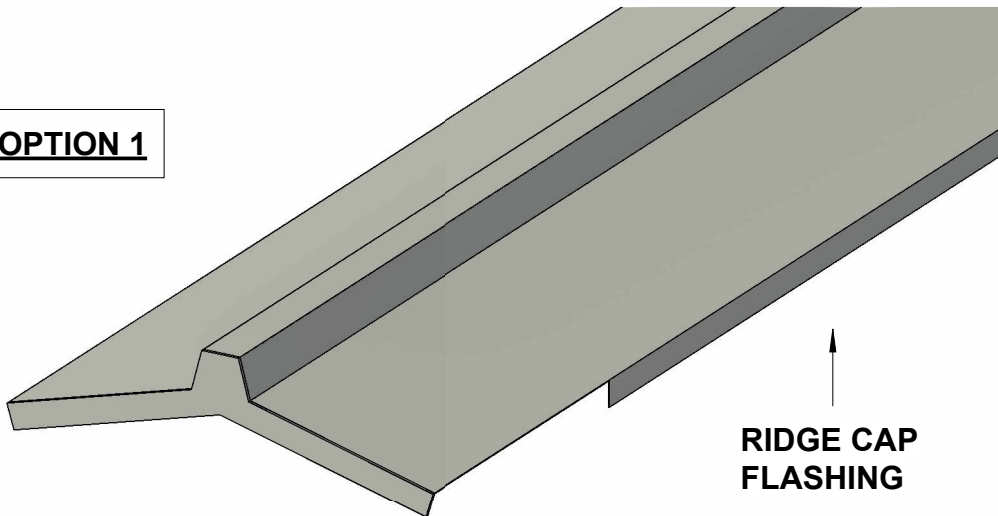

**OPTION 2**

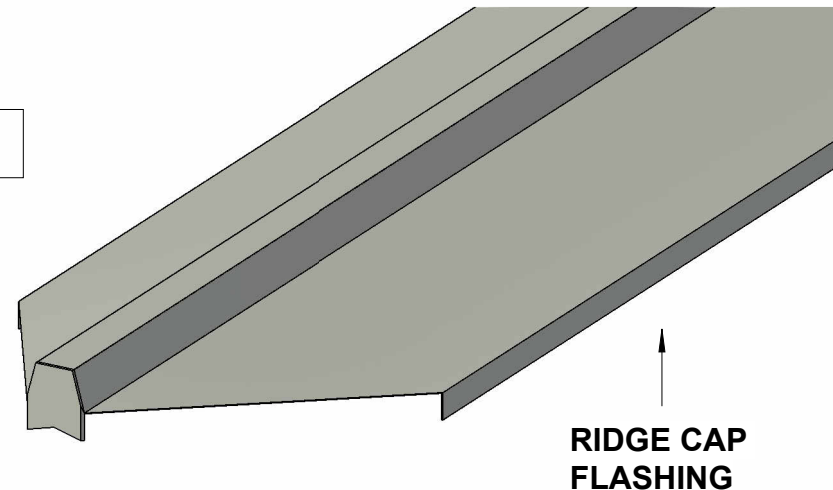


**BARGE FLASHING**

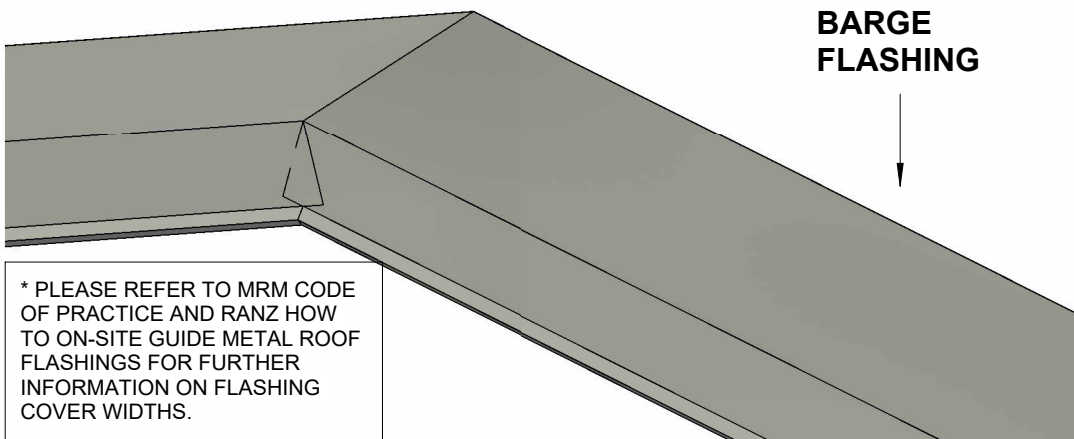

\* PLEASE REFER TO MRM CODE OF PRACTICE AND RANZ HOW TO ON-SITE GUIDE METAL ROOF FLASHINGS FOR FURTHER INFORMATION ON FLASHING COVER WIDTHS.

**BARGE FLASHING**

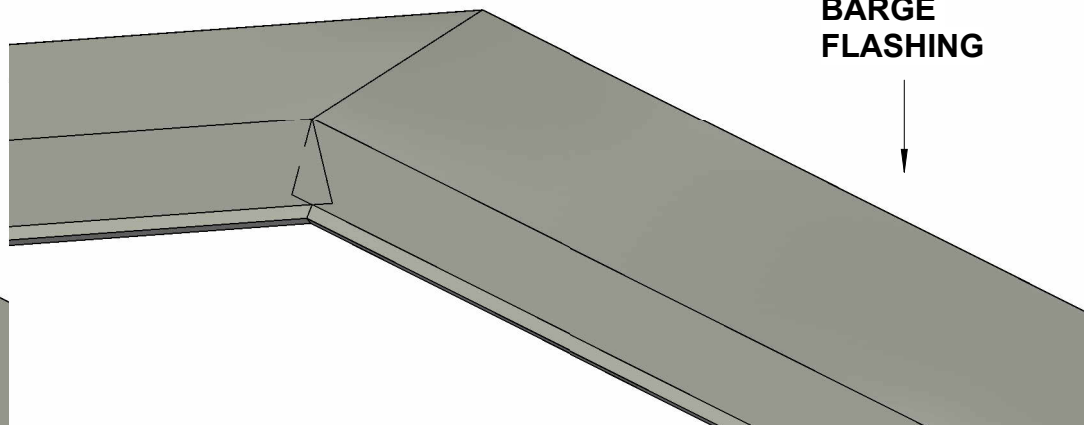


**(4) PRE-FINISHED  
BARGE FLASHING**



**(3) PRE-FINISHED 3D  
SADDLE FLASHING**

**(2) PRE-FINISHED  
APRON FLASHING**


**(1) PRE-FINISHED HIP FLASHING**

\* PLEASE REFER TO MRM CODE OF PRACTICE AND RANZ HOW TO ON-SITE GUIDE METAL ROOF FLASHINGS FOR FURTHER INFORMATION ON FLASHING COVER WIDTHS.

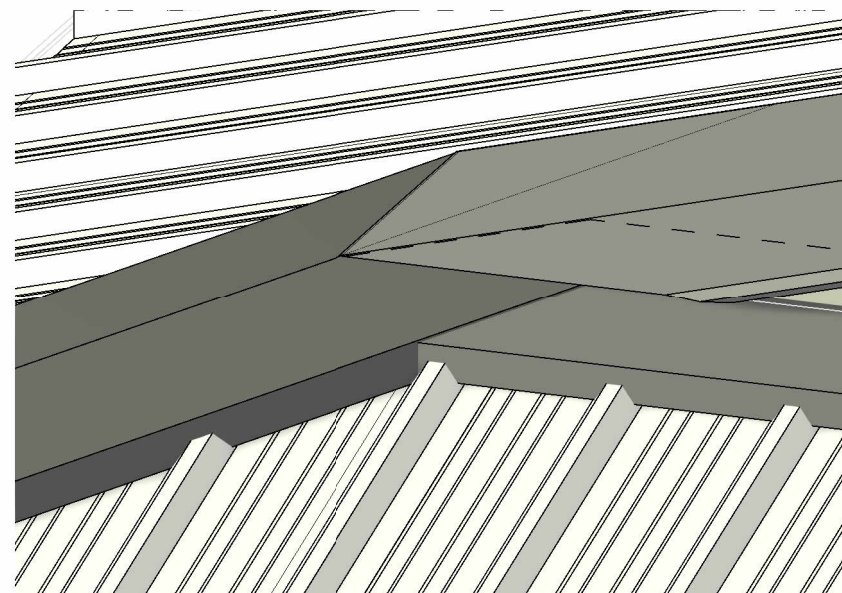

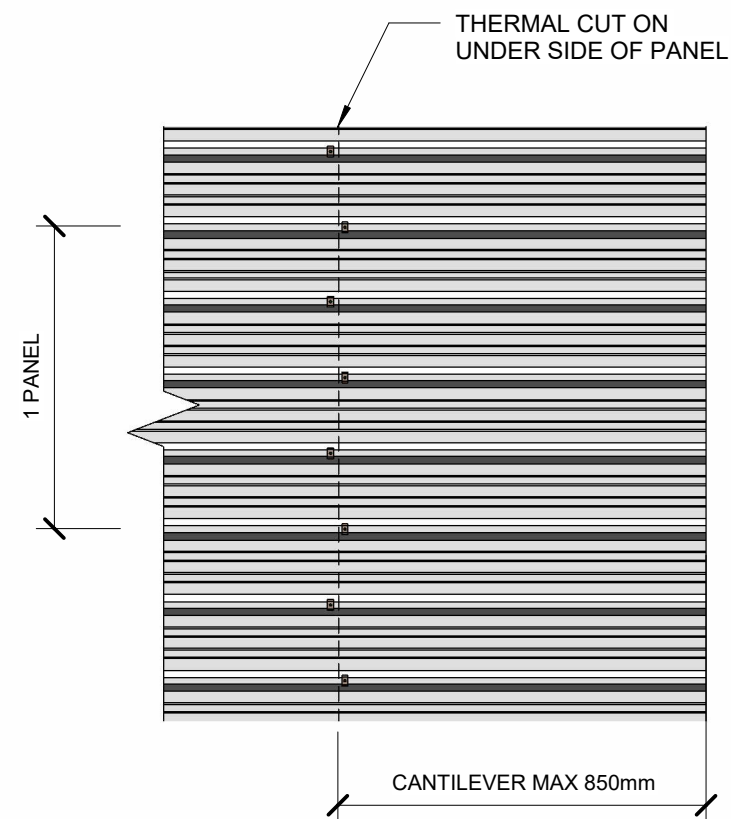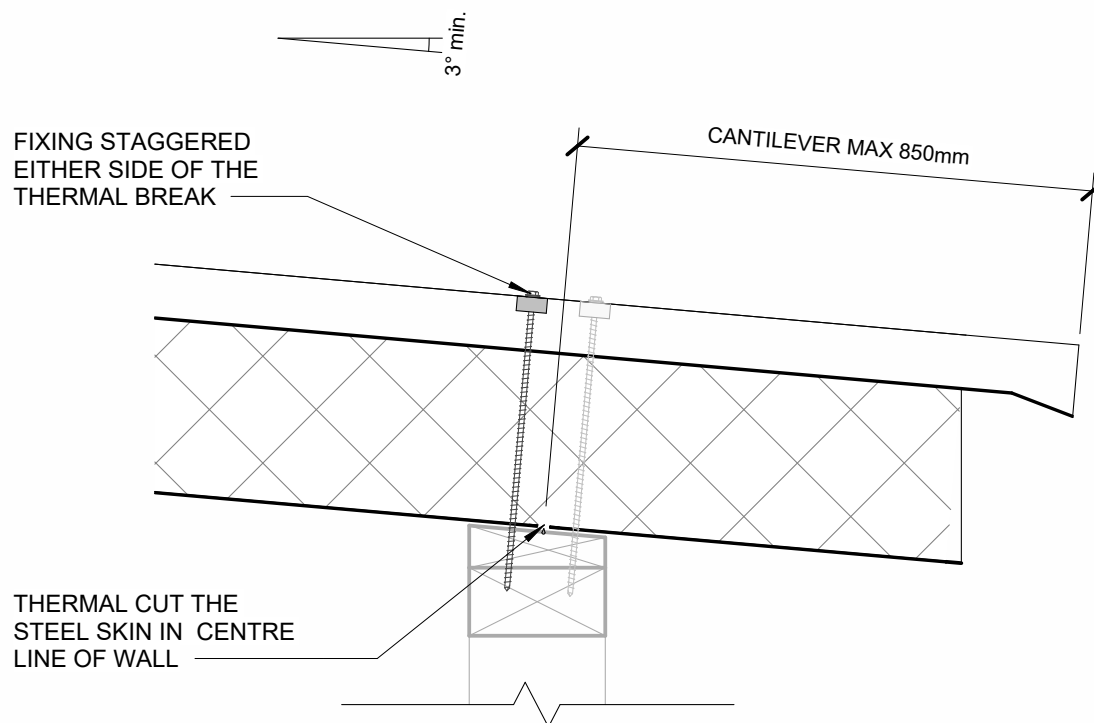

ASPIRESPAN PIR

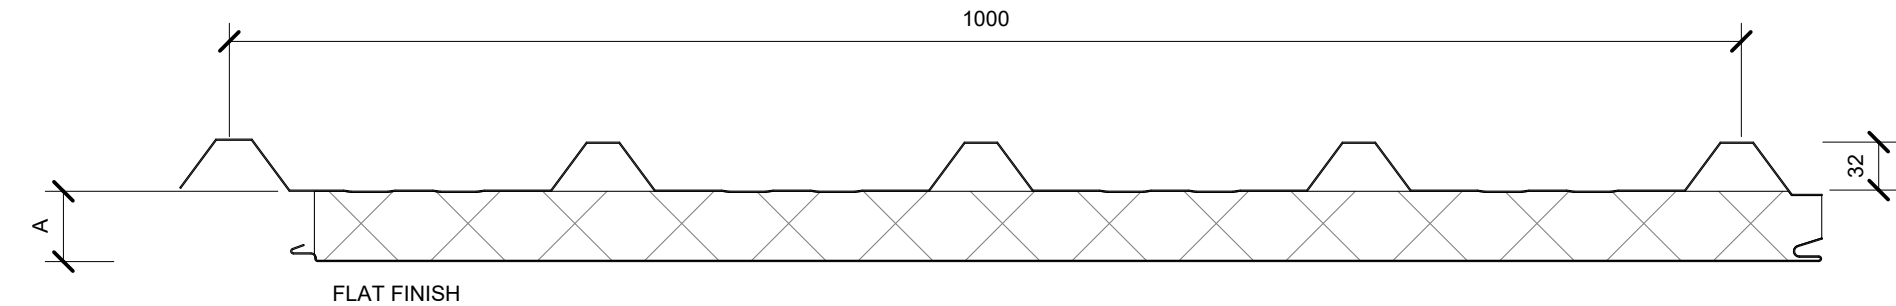


A = 50, 75, 100, 125, 150


SCALE @ 1:5

INTERNAL LINER FINISHES


SILKLINE FINISH

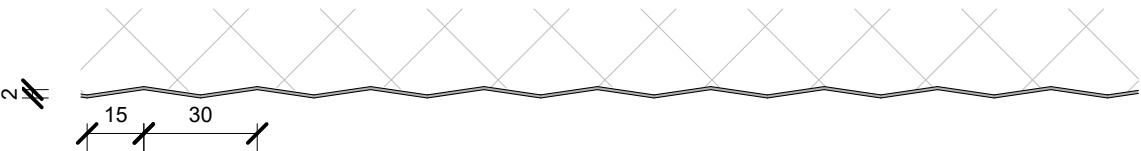

MESA FINISH

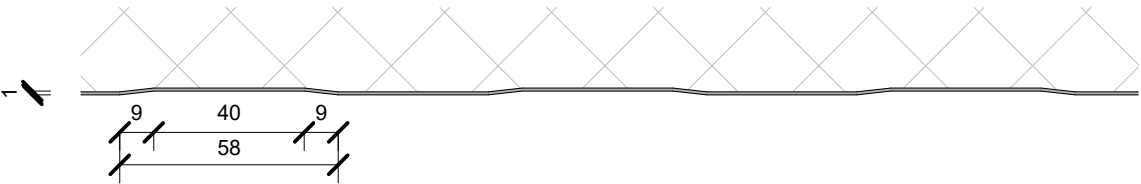

RIBBED FINISH

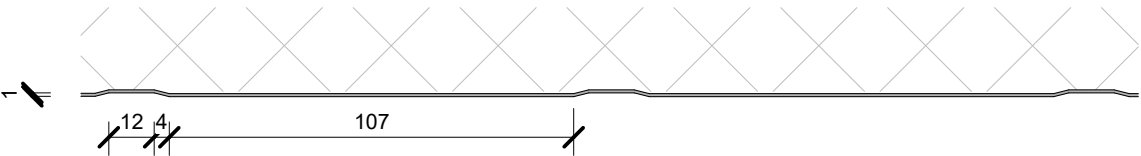

SCALE @ 1:2